


# BQ28Z610 Impedance Track™ Gas Gauge and Protection Solution for 1-Series to 2-Series Cell Li-Ion Battery Packs

## 1 Features

- Autonomous battery charging control, using a dedicated MASTER mode I<sup>2</sup>C interface
- Cell balancing with an internal bypass to optimize battery health
- A high-side protection N-CH FET drive enables serial bus communication during fault conditions
- Programmable protection levels for voltage, current, and temperature
- Analog front-end with two independent ADCs
  - Support for simultaneous current and voltage sampling
  - High-accuracy coulomb counter with input offset error < 1  $\mu$ V (typical)
- Supports down to 1-m $\Omega$  current sense resistor while capable of 1-mA current measurement
- Supports battery trip point (BTP) function for Windows® integration
- SHA-1 authentication responder for increased battery pack security
- 400-kHz I<sup>2</sup>C bus communications interface for high-speed programming and data access
- Compact 12-pin VSON package (DRZ)

## 2 Applications

- [Tablet computing](#)
- [Portable and wearable health devices](#)
- [Portable audio devices](#)
  - [Wireless \(Bluetooth\) speakers](#)

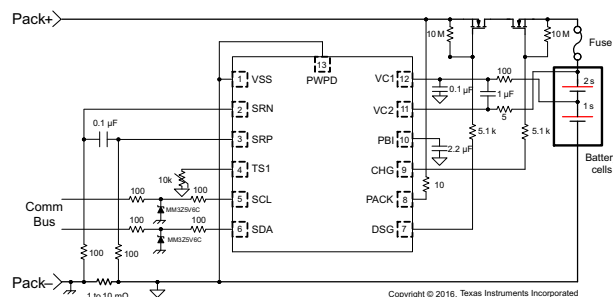

**Simplified Schematic**

## 3 Description

The Texas Instruments BQ28Z610 device is a highly integrated, accurate, 1-series to 2-series cell gas gauge and protection solution, enabling autonomous charger control and cell balancing.

The BQ28Z610 device enables autonomous charge control through Master Mode I<sup>2</sup>C broadcasts of charging current and voltage information, eliminating software overhead that is typically incurred by the system's host controller.


The BQ28Z610 device provides a fully integrated pack-based solution with a flash programmable custom reduced instruction-set CPU (RISC), safety protection, and authentication for 1-series to 2-series cell Li-ion and Li-polymer battery packs.

The BQ28Z610 gas gauge communicates through an I<sup>2</sup>C compatible interface and combines an ultra-low-power, high-speed TI BQBMP processor, high-accuracy analog measurement capabilities, integrated flash memory, an array of peripheral and communication ports, an N-CH FET drive, and a SHA-1 Authentication transform responder into a complete, high-performance battery management solution.

### Device Information

| PART NUMBER <sup>(1)</sup> | PACKAGE   | BODY SIZE (NOM) |
|----------------------------|-----------|-----------------|
| BQ28Z610                   | VSON (12) | 4 mm × 2.5 mm   |

- (1) For all available packages, see the orderable addendum at the end of the data sheet.

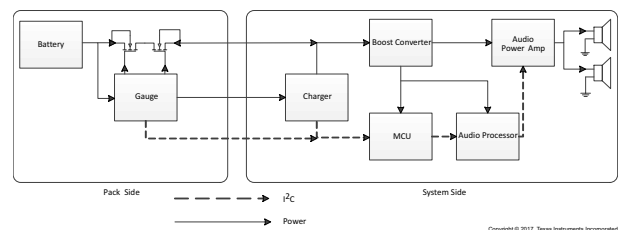

**Wireless (Bluetooth) Speaker Application  
Block Diagram**



## Table of Contents

|                                                |          |                                                        |           |
|------------------------------------------------|----------|--------------------------------------------------------|-----------|
| <b>1 Features</b> .....                        | <b>1</b> | 7.21 Instruction Flash.....                            | <b>9</b>  |
| <b>2 Applications</b> .....                    | <b>1</b> | 7.22 Data Flash.....                                   | <b>9</b>  |
| <b>3 Description</b> .....                     | <b>1</b> | 7.23 Current Protection Thresholds.....                | <b>10</b> |
| <b>4 Revision History</b> .....                | <b>2</b> | 7.24 Current Protection Timing.....                    | <b>10</b> |
| <b>5 Description (Continued)</b> .....         | <b>2</b> | 7.25 N-CH FET Drive (CHG, DSG).....                    | <b>11</b> |
| <b>6 Pin Configuration and Functions</b> ..... | <b>3</b> | 7.26 I <sup>2</sup> C Interface I/O.....               | <b>11</b> |
| <b>7 Specifications</b> .....                  | <b>4</b> | 7.27 I <sup>2</sup> C Interface Timing .....           | <b>12</b> |
| 7.1 Absolute Maximum Ratings.....              | 4        | 7.28 Typical Characteristics.....                      | 13        |
| 7.2 ESD Ratings.....                           | 4        | <b>8 Detailed Description</b> .....                    | <b>16</b> |
| 7.3 Recommended Operating Conditions.....      | 4        | 8.1 Overview.....                                      | 16        |
| 7.4 Thermal Information.....                   | 5        | 8.2 Functional Block Diagram.....                      | 16        |
| 7.5 Supply Current.....                        | 5        | 8.3 Feature Description.....                           | 17        |
| 7.6 Power Supply Control.....                  | 5        | 8.4 Device Functional Modes.....                       | 21        |
| 7.7 Low-Voltage General Purpose I/O, TS1.....  | 5        | <b>9 Applications and Implementation</b> .....         | <b>23</b> |
| 7.8 Power-On Reset (POR).....                  | 6        | 9.1 Application Information.....                       | 23        |
| 7.9 Internal 1.8-V LDO.....                    | 6        | 9.2 Typical Applications.....                          | 23        |
| 7.10 Current Wake Comparator.....              | 6        | <b>10 Layout</b> .....                                 | <b>27</b> |
| 7.11 Coulomb Counter.....                      | 7        | 10.1 Layout Guidelines.....                            | 27        |
| 7.12 ADC Digital Filter.....                   | 7        | 10.2 Layout Example.....                               | 28        |
| 7.13 ADC Multiplexer.....                      | 7        | <b>11 Device and Documentation Support</b> .....       | <b>29</b> |
| 7.14 Cell Balancing Support.....               | 7        | 11.1 Third-Party Products Disclaimer.....              | 29        |
| 7.15 Internal Temperature Sensor.....          | 8        | 11.2 Documentation Support.....                        | 29        |
| 7.16 NTC Thermistor Measurement Support.....   | 8        | 11.3 Receiving Notification of Documentation Updates.. | 29        |
| 7.17 High-Frequency Oscillator.....            | 8        | 11.4 Electrostatic Discharge Caution.....              | 29        |
| 7.18 Low-Frequency Oscillator.....             | 8        | 11.5 Support Resources.....                            | 29        |
| 7.19 Voltage Reference 1.....                  | 8        | 11.6 Trademarks.....                                   | 29        |
| 7.20 Voltage Reference 2.....                  | 9        | 11.7 Glossary.....                                     | 29        |

## 4 Revision History


| Changes from Revision C (October 2017) to Revision D (June 2021) | Page |
|------------------------------------------------------------------|------|
| • Changed <a href="#">Absolute Maximum Ratings</a> .....         | 4    |
| • Changed <a href="#">I<sup>2</sup>C Interface I/O</a> .....     | 11   |

| Changes from Revision B (December 2015) to Revision C (October 2017)                 | Page |
|--------------------------------------------------------------------------------------|------|
| • Changed <a href="#">Applications</a> .....                                         | 1    |
| • Added <a href="#">Wireless (Bluetooth) Speaker Application Block Diagram</a> ..... | 23   |

## 5 Description (Continued)

The BQ28Z610 device provides an array of battery and system safety functions, including overcurrent in discharge, short circuit in charge, and short circuit in discharge protection for the battery, as well as FET protection for the N-channel FETs, internal AFE watchdog, and cell balancing. Through firmware, the devices can provide a larger array of features including protection against overvoltage, undervoltage, overtemperature, and more.

## 6 Pin Configuration and Functions

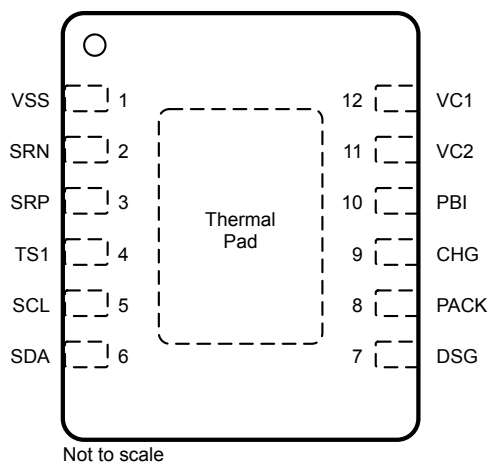

**Table 6-1. Pin Functions**

| PIN NUMBER | PIN NAME | TYPE             | DESCRIPTION                                                                                                                                                           |
|------------|----------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1          | VSS      | P <sup>(1)</sup> | Device ground                                                                                                                                                         |
| 2          | SRN      | AI               | Analog input pin connected to the internal coulomb counter peripheral for integrating a small voltage between SRP and SRN where SRP is the top of the sense resistor. |
| 3          | SRP      | AI               | Analog input pin connected to the internal coulomb counter peripheral for integrating a small voltage between SRP and SRN where SRP is the top of the sense resistor. |
| 4          | TS1      | AI               | Temperature input for ADC to the oversampled ADC channel, and optional Battery Trip Point (BTP) output                                                                |
| 5          | SCL      | I/O              | Serial Clock for I <sup>2</sup> C interface; requires external pullup when used                                                                                       |
| 6          | SDA      | I/O              | Serial Data for I <sup>2</sup> C interface; requires external pullup                                                                                                  |
| 7          | DSG      | O                | N-CH FET drive output pin                                                                                                                                             |
| 8          | PACK     | AI, P            | Pack sense input pin                                                                                                                                                  |
| 9          | CHG      | O                | N-CH FET drive output pin                                                                                                                                             |
| 10         | PBI      | P                | Power supply backup input pin                                                                                                                                         |
| 11         | VC2      | AI, P            | Sense voltage input pin for most positive cell, balance current input for most positive cell. Primary power supply input and battery stack measurement input (BAT)    |
| 12         | VC1      | AI               | Sense voltage input pin for least positive cell, balance current input for least positive cell                                                                        |
|            | PYPD     | —                | Exposed Pad, electrically connected to VSS (external trace)                                                                                                           |

(1) P = Power Connection, O = Digital Output, AI = Analog Input, I = Digital Input, I/O = Digital Input/Output

## 7 Specifications

### 7.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                                  |          | MIN            | MAX                                | UNIT |
|--------------------------------------------------|----------|----------------|------------------------------------|------|
| Supply voltage range, $V_{CC}$                   | VC2, PBI | -0.3           | 30                                 | V    |
| Input voltage range, $V_{IN}$                    | PACK     | -0.3           | 30                                 | V    |
|                                                  | TS       | -0.3           | $V_{REG} + 0.3$                    | V    |
|                                                  | SRP, SRN | -0.3           | $V_{REG} + 0.3$                    | V    |
|                                                  | VC2      | $VC1 - 0.3$    | $VC1 + 8.5$ or<br>$V_{SS} + 30$    | V    |
|                                                  | VC1      | $V_{SS} - 0.3$ | $V_{SS} + 8.5$ or<br>$V_{SS} + 30$ | V    |
| Communications Interface                         | SDA, SCL | -0.3           | 6                                  |      |
| Output voltage range, $V_O$                      | CHG, DSG | -0.3           | 32                                 | V    |
| Maximum VSS current, $I_{SS}$                    |          |                | ±50                                | mA   |
| Functional Temperature, $T_{FUNC}$               |          | -40            | 110                                | °C   |
| Lead temperature (soldering, 10 s), $T_{SOLDER}$ |          |                | ±300                               | °C   |
| Storage temperature range, $T_{STG}$             |          | -65            | 150                                | °C   |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|             |                                                                                          | VALUE | UNIT |
|-------------|------------------------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | ±2000 | V    |
|             | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | ±500  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $26\text{ V}$  (unless otherwise noted)

| PARAMETER       |                             | TEST CONDITION                       | MIN       | NOM  | MAX           | UNIT |
|-----------------|-----------------------------|--------------------------------------|-----------|------|---------------|------|
| $V_{CC}$        | Supply voltage              | VC2, PBI                             | 2.2       |      | 26            | V    |
| $V_{SHUTDOWN-}$ | Shutdown voltage            | $V_{PACK} < V_{SHUTDOWN-}$           | 1.8       | 2.0  | 2.2           | V    |
| $V_{SHUTDOWN+}$ | Start-up voltage            | $V_{PACK} > V_{SHUTDOWN-} + V_{HYS}$ | 2.05      | 2.25 | 2.45          | V    |
| $V_{HYS}$       | Shutdown voltage hysteresis | $V_{SHUTDOWN+} - V_{SHUTDOWN-}$      |           | 250  |               | mV   |
| $V_{IN}$        | Input voltage range         | SDA, SCL                             |           |      | 5.5           | V    |
|                 |                             | TS1                                  |           |      | $V_{REG}$     |      |
|                 |                             | SRP, SRN                             | -0.2      |      | 0.2           |      |
|                 |                             | VC2                                  | $V_{VC1}$ |      | $V_{VC1} + 5$ |      |
|                 |                             | VC1                                  | $V_{VSS}$ |      | $V_{VSS} + 5$ |      |
|                 |                             | PACK                                 |           |      | 26            |      |
| $V_O$           | Output voltage range        | CHG, DSG                             |           |      | 26            | V    |
| $C_{PBI}$       | External PBI capacitor      |                                      | 2.2       |      |               | μF   |
| $T_{OPR}$       | Operating temperature       |                                      | -40       |      | 85            | °C   |

## 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | BQ28Z610 | UNIT |
|-------------------------------|----------------------------------------------|----------|------|
|                               |                                              | DRZ      |      |
|                               |                                              | 12 PINS  |      |
| R <sub>θJA</sub> , High K     | Junction-to-ambient thermal resistance       | 186.4    | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case(top) thermal resistance     | 90.4     |      |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 110.7    |      |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 96.7     |      |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 90       |      |
| R <sub>θJC(bottom)</sub>      | Junction-to-case(bottom) thermal resistance  | n/a      |      |

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, [SPRA953](#).

## 7.5 Supply Current

Typical values stated where T<sub>A</sub> = 25°C and VCC = 7.2 V, Min/Max values stated where T<sub>A</sub> = –40°C to 85°C and VCC = 2.2 V to 7.6 V (unless otherwise noted)

| PARAMETER                          |               | TEST CONDITION                                | MIN | TYP | MAX | UNIT |
|------------------------------------|---------------|-----------------------------------------------|-----|-----|-----|------|
| I <sub>NORMAL</sub> <sup>(1)</sup> | NORMAL mode   | CHG = ON, DSG = ON, No Flash Write            | 250 |     |     | μA   |
| I <sub>SLEEP</sub> <sup>(1)</sup>  | SLEEP mode    | CHG = OFF, DSG = OFF, No Communication on Bus | 100 |     |     |      |
| I <sub>SHUTDOWN</sub>              | SHUTDOWN mode |                                               | 0.5 |     |     | 2 μA |

(1) Dependent on the use of the correct firmware (FW) configuration

## 7.6 Power Supply Control

Typical values stated where T<sub>A</sub> = 25°C and VCC = 7.2 V, Min/Max values stated where T<sub>A</sub> = –40°C to 85°C and VCC = 2.2 V to 7.6 V (unless otherwise noted)

| PARAMETER                |                                | TEST CONDITION                                                 | MIN  | TYP | MAX | UNIT |
|--------------------------|--------------------------------|----------------------------------------------------------------|------|-----|-----|------|
| V <sub>SWITCHOVER–</sub> | VC2 to PACK switchover voltage | V <sub>VC2</sub> < V <sub>SWITCHOVER–</sub>                    | 2.0  | 2.1 | 2.2 | V    |
| V <sub>SWITCHOVER+</sub> | PACK to VC2 switchover voltage | V <sub>VC2</sub> > V <sub>SWITCHOVER–</sub> + V <sub>HYS</sub> | 3.0  | 3.1 | 3.2 | V    |
| V <sub>HYS</sub>         | Switchover voltage hysteresis  | V <sub>SWITCHOVER+</sub> – V <sub>SWITCHOVER–</sub>            | 1000 |     |     | mV   |
| I <sub>LKG</sub>         | Input Leakage current          | VC2 pin, VC2 = 0 V, PACK = 25 V                                | 1    |     |     | μA   |
|                          |                                | PACK pin, VC2 = 25 V, PACK = 0 V                               | 1    |     |     |      |
|                          |                                | VC2 and PACK pins, VC2 = 0 V, PACK = 0 V, PBI = 25 V           | 1    |     |     |      |
| R <sub>PACK(PD)</sub>    | Internal pulldown resistance   | PACK                                                           | 30   | 40  | 50  | kΩ   |

## 7.7 Low-Voltage General Purpose I/O, TS1

Typical values stated where T<sub>A</sub> = 25°C and VCC = 7.2 V, Min/Max values stated where T<sub>A</sub> = –40°C to 85°C and VCC = 2.2 V to 7.6 V (unless otherwise noted)

| PARAMETER       |                     | TEST CONDITION             | MIN                     | TYP | MAX | UNIT |
|-----------------|---------------------|----------------------------|-------------------------|-----|-----|------|
| V <sub>IH</sub> | High-level input    |                            | 0.65 x V <sub>REG</sub> |     |     | V    |
| V <sub>IL</sub> | Low-level input     |                            | 0.35 x V <sub>REG</sub> |     |     | V    |
| V <sub>OH</sub> | Output voltage high | I <sub>OH</sub> = – 1.0 mA | 0.75 x V <sub>REG</sub> |     |     | V    |
| V <sub>OL</sub> | Output voltage low  | I <sub>OL</sub> = 1.0 mA   | 0.2 x V <sub>REG</sub>  |     |     | V    |
| C <sub>IN</sub> | Input capacitance   |                            | 5                       |     |     | pF   |

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                       | TEST CONDITION | MIN | TYP | MAX | UNIT          |
|---------------------------------|----------------|-----|-----|-----|---------------|
| $I_{LKG}$ Input leakage current |                |     |     | 1   | $\mu\text{A}$ |

## 7.8 Power-On Reset (POR)

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                 | TEST CONDITION            | MIN  | TYP  | MAX  | UNIT          |
|-------------------------------------------|---------------------------|------|------|------|---------------|
| $V_{REGIT-}$ Negative-going voltage input | $V_{REG}$                 | 1.51 | 1.55 | 1.59 | V             |
| $V_{HYS}$ Power-on reset hysteresis       | $V_{REGIT+} - V_{REGIT-}$ | 70   | 100  | 130  | mV            |
| $t_{RST}$ Power-on reset time             |                           | 200  | 300  | 400  | $\mu\text{s}$ |

## 7.9 Internal 1.8-V LDO

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                              | TEST CONDITION                                                                                            | MIN                 | TYP  | MAX | UNIT |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------------------|------|-----|------|
| $V_{REG}$ Regulator voltage                            |                                                                                                           | 1.6                 | 1.8  | 2.0 | V    |
| $\Delta V_{O(TEMP)}$ Regulator output over temperature | $\Delta V_{REG}/\Delta T_A$ , $I_{REG} = 10\text{ mA}$                                                    | $\pm 0.25\%$        |      |     |      |
| $\Delta V_{O(LINE)}$ Line regulation                   | $\Delta V_{REG}/\Delta V_{BAT}$ , $V_{BAT} = 10\text{ mA}$                                                | $-0.6\%$ to $0.5\%$ |      |     |      |
| $\Delta V_{O(LOAD)}$ Load regulation                   | $\Delta V_{REG}/\Delta I_{REG}$ , $I_{REG} = 0\text{ mA}$ to $10\text{ mA}$                               | $-1.5\%$ to $1.5\%$ |      |     |      |
| $I_{REG}$ Regulator output current limit               | $V_{REG} = 0.9 \times V_{REG(NOM)}$ , $V_{IN} > 2.2\text{ V}$                                             | 20                  |      |     | mA   |
| $I_{SC}$ Regulator short-circuit current limit         | $V_{REG} = 0 \times V_{REG(NOM)}$                                                                         | 25                  | 40   | 50  | mA   |
| $PSRR_{REG}$ Power supply rejection ratio              | $\Delta V_{BAT}/\Delta V_{REG}$ , $I_{REG} = 10\text{ mA}$ , $V_{IN} > 2.5\text{ V}$ , $f = 10\text{ Hz}$ | 40                  |      |     | dB   |
| $V_{SLEW}$ Slew rate enhancement voltage threshold     | $V_{REG}$                                                                                                 | 1.58                | 1.65 |     | V    |

## 7.10 Current Wake Comparator

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                                  | TEST CONDITION                                                     | MIN         | TYP         | MAX       | UNIT             |
|------------------------------------------------------------|--------------------------------------------------------------------|-------------|-------------|-----------|------------------|
| $V_{WAKE}$ Wake voltage threshold                          | $V_{WAKE} = V_{SRP} - V_{SRN}$ WAKE_CONTROL[WK1, WK0] = 0,0        | $\pm 0.3$   | $\pm 0.625$ | $\pm 0.9$ | mV               |
|                                                            | $V_{WAKE} = V_{SRP} - V_{SRN}$ WAKE_CONTROL[WK1, WK0] = 0,1        | $\pm 0.6$   | $\pm 1.25$  | $\pm 1.8$ | mV               |
|                                                            | $V_{WAKE} = V_{SRP} - V_{SRN}$ WAKE_CONTROL[WK1, WK0] = 1,0        | $\pm 1.2$   | $\pm 2.5$   | $\pm 3.6$ | mV               |
|                                                            | $V_{WAKE} = V_{SRP} - V_{SRN}$ WAKE_CONTROL[WK1, WK0] = 1,1        | $\pm 2.4$   | $\pm 5.0$   | $\pm 7.2$ | mV               |
| $V_{WAKE(DRIFT)}$ Temperature drift of $V_{WAKE}$ accuracy |                                                                    | 0.5%        |             |           | $^\circ\text{C}$ |
| $t_{WAKE}$ Time from application of current to wake        |                                                                    | 0.25 to 0.5 |             |           | ms               |
| $t_{WAKE(SU)}$ Wake up comparator startup time             | [WKCHGEN] = 0 and [WKDSGEN] = 0 to [WKCHGEN] = 1 and [WKDSGEN] = 1 | 250 to 640  |             |           | $\mu\text{s}$    |

## 7.11 Coulomb Counter

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                  | TEST CONDITION                            | MIN            | TYP       | MAX            | UNIT                  |
|----------------------------|-------------------------------------------|----------------|-----------|----------------|-----------------------|
| Input voltage range        |                                           | -100           |           | 100            | mV                    |
| Full scale range           |                                           | $-V_{REF1}/10$ |           | $+V_{REF1}/10$ | mV                    |
| Differential nonlinearity  | 16-bit, No missing codes                  |                |           | $\pm 1$        | LSB                   |
| Integral nonlinearity      | 16-bit, Best fit over input voltage range |                | $\pm 5.2$ | $\pm 22.3$     | LSB                   |
| Offset error               | 16-bit, Post-calibration                  |                | $\pm 1.3$ | $\pm 2.6$      | LSB                   |
| Offset error drift         | 15-bit + sign, Post-calibration           |                | 0.04      | 0.07           | LSB/ $^\circ\text{C}$ |
| Gain error                 | 15-bit + sign, Over input voltage range   |                | $\pm 131$ | $\pm 492$      | LSB                   |
| Gain error drift           | 15-bit + sign, Over input voltage range   |                | 4.3       | 9.8            | LSB/ $^\circ\text{C}$ |
| Effective input resistance |                                           | 2.5            |           |                | M $\Omega$            |

## 7.12 ADC Digital Filter

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER            | TEST CONDITION                                 | MIN | TYP   | MAX | UNIT |
|----------------------|------------------------------------------------|-----|-------|-----|------|
| $t_{\text{CONV}}$    | ADCTL[SPEED1, SPEED0] = 0, 0                   |     | 31.25 |     | ms   |
|                      | ADCTL[SPEED1, SPEED0] = 0, 1                   |     | 15.63 |     |      |
|                      | ADCTL[SPEED1, SPEED0] = 1, 0                   |     | 7.81  |     |      |
|                      | ADCTL[SPEED1, SPEED0] = 1, 1                   |     | 1.95  |     |      |
| Resolution           | No missing codes, ADCTL[SPEED1, SPEED0] = 0, 0 |     | 16    |     | Bits |
| Effective resolution | With sign, ADCTL[SPEED1, SPEED0] = 0, 0        | 14  | 15    |     | Bits |
|                      | With sign, ADCTL[SPEED1, SPEED0] = 0, 1        | 13  | 14    |     |      |
|                      | With sign, ADCTL[SPEED1, SPEED0] = 1, 0        | 11  | 12    |     |      |
|                      | With sign, ADCTL[SPEED1, SPEED0] = 1, 1        | 9   | 10    |     |      |

## 7.13 ADC Multiplexer

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                              | TEST CONDITION                                                              | MIN    | TYP                         | MAX    | UNIT          |
|----------------------------------------|-----------------------------------------------------------------------------|--------|-----------------------------|--------|---------------|
| K      Scaling factor                  | VC1–VSS, VC2–VC1                                                            | 0.1980 | 0.2000                      | 0.2020 | —             |
|                                        | VC2–VSS, PACK–VSS                                                           | 0.0485 | 0.050                       | 0.051  |               |
|                                        | $V_{REF1}/2$                                                                | 0.490  | 0.500                       | 0.510  |               |
| $V_{\text{IN}}$ Input voltage range    | VC2–VSS, PACK–VSS                                                           | -0.2   |                             | 20     | V             |
|                                        | TS1                                                                         | -0.2   | $0.8 \times V_{REF1}$       |        |               |
|                                        | TS1                                                                         | -0.2   | $0.8 \times V_{\text{REG}}$ |        |               |
| $I_{\text{LKG}}$ Input leakage current | VC1, VC2 cell balancing off, cell detach detection off, ADC multiplexer off |        |                             | 1      | $\mu\text{A}$ |

## 7.14 Cell Balancing Support

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                        | TEST CONDITION                                                                           | MIN | TYP | MAX | UNIT     |
|--------------------------------------------------|------------------------------------------------------------------------------------------|-----|-----|-----|----------|
| $R_{\text{CB}}$ Internal cell balance resistance | $R_{\text{DS(ON)}}$ for internal FET switch at $2\text{ V} < V_{\text{DS}} < 4\text{ V}$ |     |     | 200 | $\Omega$ |

## 7.15 Internal Temperature Sensor

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                            | TEST CONDITION                          | MIN   | TYP   | MAX   | UNIT                 |
|------------------------------------------------------|-----------------------------------------|-------|-------|-------|----------------------|
| $V_{TEMP}$ Internal temperature sensor voltage drift | $V_{TEMPPP}$                            | -1.9  | -2.0  | -2.1  | mV/ $^\circ\text{C}$ |
|                                                      | $V_{TEMPPP} - V_{TEMPN}$ <sup>(1)</sup> | 0.177 | 0.178 | 0.179 |                      |

(1) Assured by design

## 7.16 NTC Thermistor Measurement Support

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                          | TEST CONDITION | MIN  | TYP  | MAX  | UNIT                  |
|----------------------------------------------------|----------------|------|------|------|-----------------------|
| $R_{NTC(PU)}$ Internal pullup resistance           | TS1            | 14.4 | 18   | 21.6 | k $\Omega$            |
| $R_{NTC(DRIFT)}$ Resistance drift over temperature | TS1            | -360 | -280 | -200 | PPM/ $^\circ\text{C}$ |

## 7.17 High-Frequency Oscillator

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                      | TEST CONDITION                                                                                                         | MIN   | TYP          | MAX  | UNIT          |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------|-------|--------------|------|---------------|
| $f_{HFO}$ Operating frequency  |                                                                                                                        |       | 16.78        |      | MHz           |
| $f_{HFO(ERR)}$ Frequency error | $T_A = -20^\circ\text{C}$ to $70^\circ\text{C}$ , includes frequency drift                                             | -2.5% | $\pm 0.25\%$ | 2.5% |               |
|                                | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , includes frequency drift                                             | -3.5% | $\pm 0.25\%$ | 3.5% |               |
| $t_{HFO(SU)}$ Start-up time    | $T_A = -20^\circ\text{C}$ to $85^\circ\text{C}$ , Oscillator frequency within $\pm 3\%$ of nominal, CLKCTL[HFRAMP] = 1 |       |              | 4    | ms            |
|                                | Oscillator frequency within $\pm 3\%$ of nominal, CLKCTL[HFRAMP] = 0                                                   |       |              | 100  | $\mu\text{s}$ |

## 7.18 Low-Frequency Oscillator

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                           | TEST CONDITION                                                             | MIN   | TYP          | MAX  | UNIT |
|-----------------------------------------------------|----------------------------------------------------------------------------|-------|--------------|------|------|
| $f_{LFO}$ Operating frequency                       |                                                                            |       | 262.144      |      | kHz  |
| $f_{LFO(LP)}$ Operating frequency in low power mode |                                                                            |       | 247          |      | kHz  |
| $f_{LFO(ERR)}$ Frequency error                      | $T_A = -20^\circ\text{C}$ to $70^\circ\text{C}$ , includes frequency drift | -1.5% | $\pm 0.25\%$ | 1.5% |      |
|                                                     | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , includes frequency drift | -2.5% | $\pm 0.25\%$ | 2.5% |      |
| $f_{LFO(LPERR)}$ Frequency error in low power mode  |                                                                            | -5%   |              | 5%   |      |
| $f_{LFO(FAIL)}$ Failure detection frequency         |                                                                            | 30    | 80           | 100  | kHz  |

## 7.19 Voltage Reference 1

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                             | TEST CONDITION                        | MIN   | TYP   | MAX   | UNIT |
|---------------------------------------|---------------------------------------|-------|-------|-------|------|
| $V_{REF1}$ Internal reference voltage | $T_A = 25^\circ\text{C}$ , after trim | 1.215 | 1.220 | 1.225 | V    |



Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                          | TEST CONDITION                                               | MIN | TYP      | MAX | UNIT                  |
|----------------------------------------------------|--------------------------------------------------------------|-----|----------|-----|-----------------------|
| $V_{REF1(DRIFT)}$ Internal reference voltage drift | $T_A = 0^\circ\text{C}$ to $60^\circ\text{C}$ , after trim   |     | $\pm 50$ |     | PPM/ $^\circ\text{C}$ |
|                                                    | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , after trim |     | $\pm 80$ |     |                       |

## 7.20 Voltage Reference 2

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                          | TEST CONDITION                                               | MIN   | TYP      | MAX   | UNIT                  |
|----------------------------------------------------|--------------------------------------------------------------|-------|----------|-------|-----------------------|
| $V_{REF2}$ Internal reference voltage              | $T_A = 25^\circ\text{C}$ , after trim                        | 1.215 | 1.220    | 1.225 | V                     |
| $V_{REF2(DRIFT)}$ Internal reference voltage drift | $T_A = 0^\circ\text{C}$ to $60^\circ\text{C}$ , after trim   |       | $\pm 50$ |       | PPM/ $^\circ\text{C}$ |
|                                                    | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , after trim |       | $\pm 80$ |       |                       |

## 7.21 Instruction Flash

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                            | TEST CONDITION                                  | MIN  | TYP | MAX | UNIT          |
|--------------------------------------|-------------------------------------------------|------|-----|-----|---------------|
|                                      | Data retention                                  | 10   |     |     | Years         |
|                                      | Flash programming write cycles                  | 1000 |     |     | Cycles        |
| $t_{PROGWORD}$ Word programming time | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |      |     | 40  | $\mu\text{s}$ |
| $t_{MASSERASE}$ Mass-erase time      | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |      |     | 40  | ms            |
| $t_{PAGEERASE}$ Page-erase time      | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |      |     | 40  | ms            |
| $I_{FLASHREAD}$ Flash-read current   | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |      |     | 2   | mA            |
| $I_{FLASHWRITE}$ Flash-write current | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |      |     | 5   | mA            |
| $I_{FLASHERASE}$ Flash-erase current | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |      |     | 15  | mA            |

## 7.22 Data Flash

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                            | TEST CONDITION                                  | MIN   | TYP | MAX | UNIT          |
|--------------------------------------|-------------------------------------------------|-------|-----|-----|---------------|
|                                      | Data retention                                  | 10    |     |     | Years         |
|                                      | Flash programming write cycles                  | 20000 |     |     | Cycles        |
| $t_{PROGWORD}$ Word programming time | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |       |     | 40  | $\mu\text{s}$ |
| $t_{MASSERASE}$ Mass-erase time      | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |       |     | 40  | ms            |
| $t_{PAGEERASE}$ Page-erase time      | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |       |     | 40  | ms            |
| $I_{FLASHREAD}$ Flash-read current   | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |       |     | 1   | mA            |
| $I_{FLASHWRITE}$ Flash-write current | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |       |     | 5   | mA            |
| $I_{FLASHERASE}$ Flash-erase current | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ |       |     | 15  | mA            |

## 7.23 Current Protection Thresholds

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                                              | TEST CONDITION                                                                        | MIN   | TYP   | MAX  | UNIT |
|------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------|-------|------|------|
| $V_{\text{OCD}}$ OCD detection threshold voltage range                 | $V_{\text{OCD}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 1  | -16.6 |       | -100 | mV   |
|                                                                        | $V_{\text{OCD}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 0  | -8.3  |       | -50  |      |
| $\Delta V_{\text{OCD}}$ OCD detection threshold voltage program step   | $V_{\text{OCD}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 1  |       | -5.56 |      | mV   |
|                                                                        | $V_{\text{OCD}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 0  |       | -2.78 |      |      |
| $\Delta V_{\text{SCC}}$ SCC detection threshold voltage range          | $V_{\text{SCC}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 1  | 44.4  |       | 200  | mV   |
|                                                                        | $V_{\text{SCC}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 0  | 22.2  |       | 100  |      |
| $\Delta V_{\text{SCC}}$ SCC detection threshold voltage program step   | $V_{\text{SCC}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 1  |       | 22.2  |      | mV   |
|                                                                        | $V_{\text{SCC}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 0  |       | 11.1  |      |      |
| $V_{\text{SCD1}}$ SCD1 detection threshold voltage range               | $V_{\text{SCD1}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 1 | -44.4 |       | -200 | mV   |
|                                                                        | $V_{\text{SCD1}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 0 | -22.2 |       | -100 |      |
| $\Delta V_{\text{SCD1}}$ SCD1 detection threshold voltage program step | $V_{\text{SCD1}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 1 |       | -22.2 |      | mV   |
|                                                                        | $V_{\text{SCD1}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 0 |       | -11.1 |      |      |
| $V_{\text{SCD2}}$ SCD2 detection threshold voltage range               | $V_{\text{SCD2}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 1 | -44.4 |       | -200 | mV   |
|                                                                        | $V_{\text{SCD2}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 0 | -22.2 |       | -100 |      |
| $\Delta V_{\text{SCD2}}$ SCD2 detection threshold voltage program step | $V_{\text{SCD2}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 1 |       | -22.2 |      | mV   |
|                                                                        | $V_{\text{SCD2}} = V_{\text{SRP}} - V_{\text{SRN}}$ ,<br>PROTECTION_CONTROL[RSNS] = 0 |       | -11.1 |      |      |

## 7.24 Current Protection Timing

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                                       | TEST CONDITION                 | MIN | NOM | MAX  | UNIT          |
|-----------------------------------------------------------------|--------------------------------|-----|-----|------|---------------|
| $t_{\text{OCD}}$ OCD detection delay time                       |                                | 1   |     | 31   | ms            |
| $\Delta t_{\text{OCD}}$ OCD detection delay time program step   |                                |     | 2   |      | ms            |
| $t_{\text{SCC}}$ SCC detection delay time                       |                                | 0   |     | 915  | $\mu\text{s}$ |
| $\Delta t_{\text{SCC}}$ SCC detection delay time program step   |                                |     | 61  |      | $\mu\text{s}$ |
| $t_{\text{SCD1}}$ SCD1 detection delay time                     | PROTECTION_CONTROL[SCDDx2] = 0 | 0   |     | 915  | $\mu\text{s}$ |
|                                                                 | PROTECTION_CONTROL[SCDDx2] = 1 | 0   |     | 1850 |               |
| $\Delta t_{\text{SCD1}}$ SCD1 detection delay time program step | PROTECTION_CONTROL[SCDDx2] = 0 |     | 61  |      | $\mu\text{s}$ |
|                                                                 | PROTECTION_CONTROL[SCDDx2] = 1 |     | 121 |      |               |

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                                       | TEST CONDITION                                                                                                                                 | MIN  | NOM  | MAX | UNIT          |
|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-----|---------------|
| $t_{\text{SCD2}}$ SCD2 detection delay time                     | PROTECTION_CONTROL[SCDDx2] = 0                                                                                                                 | 0    |      | 458 | $\mu\text{s}$ |
|                                                                 | PROTECTION_CONTROL[SCDDx2] = 1                                                                                                                 | 0    |      | 915 |               |
| $\Delta t_{\text{SCD2}}$ SCD2 detection delay time program step | PROTECTION_CONTROL[SCDDx2] = 0                                                                                                                 |      | 30.5 |     | $\mu\text{s}$ |
|                                                                 | PROTECTION_CONTROL[SCDDx2] = 1                                                                                                                 |      | 61   |     |               |
| $t_{\text{DETECT}}$ Current fault detect time                   | $V_{\text{SRP}} - V_{\text{SRN}} = V_T - 3\text{ mV}$ for OCD, SCD1, and SC2,<br>$V_{\text{SRP}} - V_{\text{SRN}} = V_T + 3\text{ mV}$ for SCC |      |      | 160 | $\mu\text{s}$ |
| $t_{\text{ACC}}$ Current fault delay time accuracy              | Max delay setting                                                                                                                              | -10% |      | 10% |               |

## 7.25 N-CH FET Drive (CHG, DSG)

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                                             | TEST CONDITION                                                                                                                                                                                                                     | MIN   | TYP   | MAX   | UNIT          |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------|---------------|
| Output voltage ratio                                  | $\text{Ratio}_{\text{DSG}} = (V_{\text{DSG}} - V_{\text{VC2}})/V_{\text{VC2}}$ , $2.2\text{ V} < V_{\text{VC2}} < 4.07\text{ V}$ , $10\text{ M}\Omega$ between PACK and DSG                                                        | 2.133 | 2.333 | 2.467 | —             |
|                                                       | $\text{Ratio}_{\text{CHG}} = (V_{\text{CHG}} - V_{\text{VC2}})/V_{\text{VC2}}$ , $2.2\text{ V} < V_{\text{VC2}} < 4.07\text{ V}$ , $10\text{ M}\Omega$ between BAT and CHG                                                         | 2.133 | 2.333 | 2.467 |               |
| $V_{(\text{FETON})}$ Output voltage, CHG and DSG on   | $V_{\text{DSG(ON)}} = V_{\text{DSG}} - V_{\text{VC2}}$ , $4.07\text{ V} \leq V_{\text{VC2}} \leq 18\text{ V}$ , $10\text{ M}\Omega$ between PACK and DSG                                                                           | 8.75  | 9.5   | 10.25 | V             |
|                                                       | $V_{\text{CHG(ON)}} = V_{\text{CHG}} - V_{\text{VC2}}$ , $4.07\text{ V} \leq V_{\text{VC2}} \leq 18\text{ V}$ , $10\text{ M}\Omega$ between VC2 and CHG                                                                            | 8.75  | 9.5   | 10.25 |               |
| $V_{(\text{FETOFF})}$ Output voltage, CHG and DSG off | $V_{\text{DSG(OFF)}} = V_{\text{DSG}} - V_{\text{PACK}}$ , $10\text{ M}\Omega$ between PACK and DSG                                                                                                                                | -0.4  |       | 0.4   | V             |
|                                                       | $V_{\text{CHG(OFF)}} = V_{\text{CHG}} - V_{\text{BAT}}$ , $10\text{ M}\Omega$ between VC2 and CHG                                                                                                                                  | -0.4  |       | 0.4   |               |
| $t_R$ Rise time                                       | $V_{\text{DSG}}$ from 0% to 35% $V_{\text{DSG(ON)(TYP)}}$ , $V_{\text{BAT}} \geq 2.2\text{ V}$ , $C_L = 4.7\text{ nF}$ between DSG and PACK, $5.1\text{ k}\Omega$ between DSG and $C_L$ , $10\text{ M}\Omega$ between PACK and DSG |       | 200   | 500   | $\mu\text{s}$ |
|                                                       | $V_{\text{CHG}}$ from 0% to 35% $V_{\text{CHG(ON)(TYP)}}$ , $V_{\text{VC2}} \geq 2.2\text{ V}$ , $C_L = 4.7\text{ nF}$ between CHG and VC2, $5.1\text{ k}\Omega$ between CHG and $C_L$ , $10\text{ M}\Omega$ between VC2 and CHG   |       | 200   | 500   |               |
| $t_F$ Fall time                                       | $V_{\text{DSG}}$ from $V_{\text{DSG(ON)(TYP)}}$ to 1 V, $V_{\text{VC2}} \geq 2.2\text{ V}$ , $C_L = 4.7\text{ nF}$ between DSG and PACK, $5.1\text{ k}\Omega$ between DSG and $C_L$ , $10\text{ M}\Omega$ between PACK and DSG     |       | 40    | 300   | $\mu\text{s}$ |
|                                                       | $V_{\text{CHG}}$ from $V_{\text{CHG(ON)(TYP)}}$ to 1 V, $V_{\text{VC2}} \geq 2.2\text{ V}$ , $C_L = 4.7\text{ nF}$ between CHG and VC2, $5.1\text{ k}\Omega$ between CHG and $C_L$ , $10\text{ M}\Omega$ between VC2 and CHG       |       | 40    | 200   |               |

## 7.26 I<sup>2</sup>C Interface I/O

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER                              | TEST CONDITION                                                                                      | MIN                         | TYP                         | MAX | UNIT          |
|----------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-----|---------------|
| $V_{\text{IH}}$ Input voltage high     | SCL, SDA, $V_{\text{REG}} = 1.8\text{ V}$ (STANDARD and FAST modes)                                 | $0.7 \times V_{\text{REG}}$ |                             |     | V             |
| $V_{\text{IL}}$ Input voltage low      | SCL, SDA, $V_{\text{REG}} = 1.8\text{ V}$ (STANDARD and FAST modes)                                 | -0.5                        | $0.3 \times V_{\text{REG}}$ |     | V             |
| $V_{\text{OL}}$ Output low voltage     | SCL, SDA, $V_{\text{REG}} = 1.8\text{ V}$ , $I_{\text{OL}} = 1\text{ mA}$ (FAST mode)               |                             | $0.2 \times V_{\text{REG}}$ |     | V             |
|                                        | SCL, SDA, $V_{\text{REG}} > 2.0\text{ V}$ , $I_{\text{OL}} = 1\text{ mA}$ (STANDARD and FAST modes) |                             |                             | 0.4 | V             |
| $C_{\text{IN}}$ Input capacitance      |                                                                                                     |                             |                             | 10  | pF            |
| $I_{\text{LKG}}$ Input leakage current |                                                                                                     |                             | 1                           |     | $\mu\text{A}$ |
| $R_{\text{PD}}$ Pull-down resistance   |                                                                                                     |                             | 3.3                         |     | k $\Omega$    |

## 7.27 I<sup>2</sup>C Interface Timing

Typical values stated where  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 7.2\text{ V}$ , Min/Max values stated where  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  and  $V_{CC} = 2.2\text{ V}$  to  $7.6\text{ V}$  (unless otherwise noted)

| PARAMETER              | TEST CONDITION                       | MIN | NOM | MAX | UNIT          |
|------------------------|--------------------------------------|-----|-----|-----|---------------|
| $t_R$                  | Clock rise time                      |     |     | 300 | ns            |
| $t_F$                  | Clock fall time                      |     |     | 300 | ns            |
| $t_{\text{HIGH}}$      | Clock high period                    | 600 |     |     | ns            |
| $t_{\text{LOW}}$       | Clock low period                     | 1.3 |     |     | $\mu\text{s}$ |
| $t_{\text{SU(START)}}$ | Repeated start setup time            | 600 |     |     | ns            |
| $t_{\text{d(START)}}$  | Start for first falling edge to SCL  | 600 |     |     | ns            |
| $t_{\text{SU(DATA)}}$  | Data setup time                      | 100 |     |     | ns            |
| $t_{\text{HD(DATA)}}$  | Data hold time                       | 0   |     |     | $\mu\text{s}$ |
| $t_{\text{SU(STOP)}}$  | Stop setup time                      | 600 |     |     | ns            |
| $t_{\text{BUF}}$       | Bus free time between stop and start | 1.3 |     |     | $\mu\text{s}$ |
| $f_{\text{SW}}$        | Clock operating frequency            |     |     | 400 | kHz           |



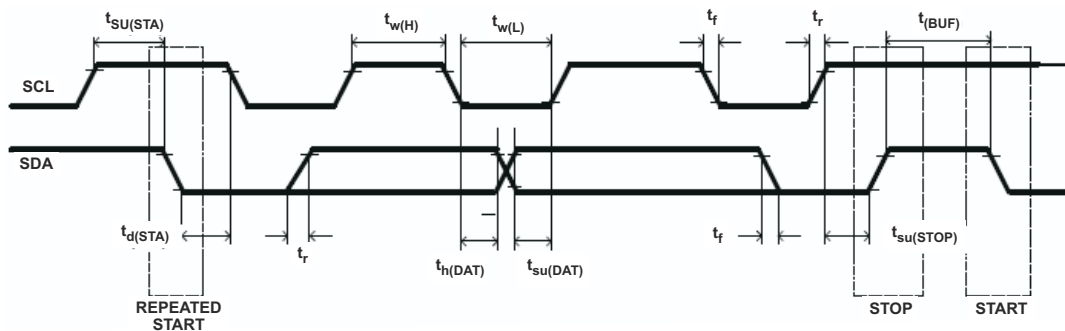


Figure 7-1. I<sup>2</sup>C Timing


## 7.28 Typical Characteristics

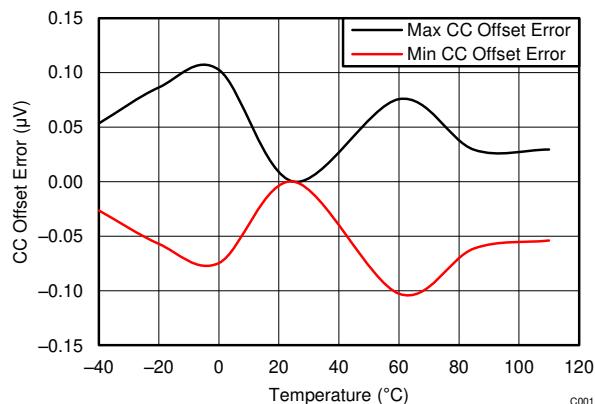


**Figure 7-2. CC Offset Error vs. Temperature**

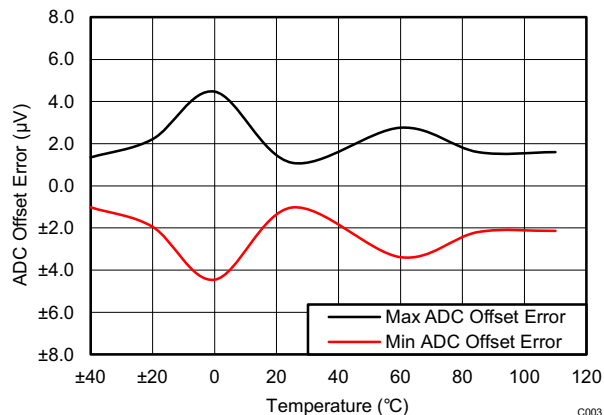


**Figure 7-3. ADC Offset Error vs. Temperature**

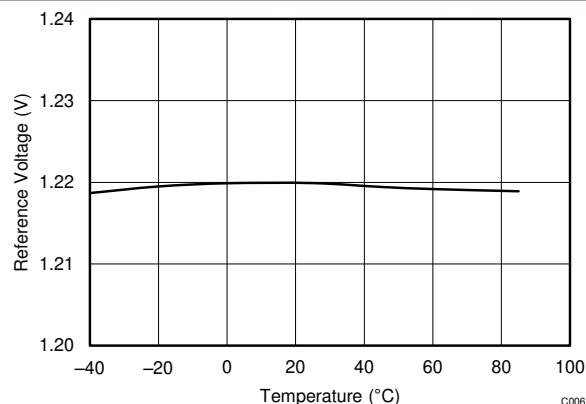


**Figure 7-4. Reference Voltage vs. Temperature**

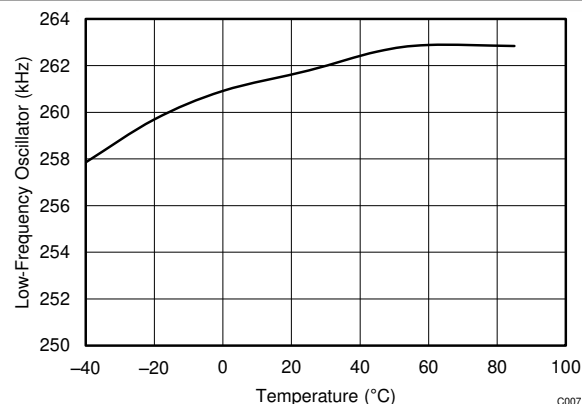

**Figure 7-5. Low-Frequency Oscillator vs. Temperature**

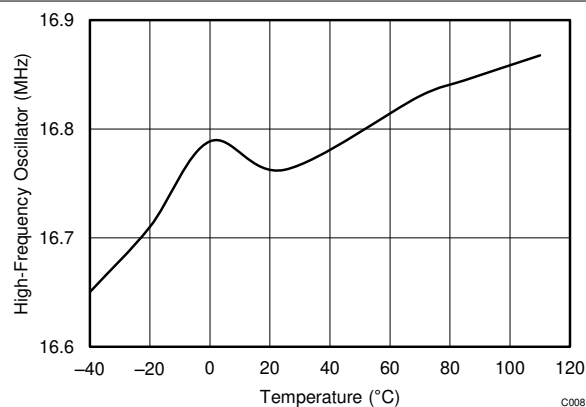


**Figure 7-6. High-Frequency Oscillator vs. Temperature**

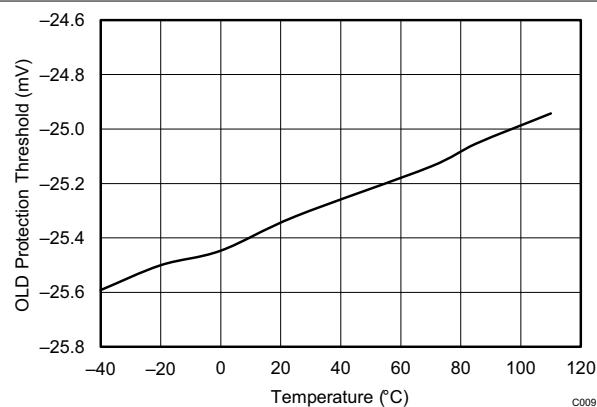


Threshold setting is 25 mV.

**Figure 7-7. Overcurrent Discharge Protection Threshold vs. Temperature**

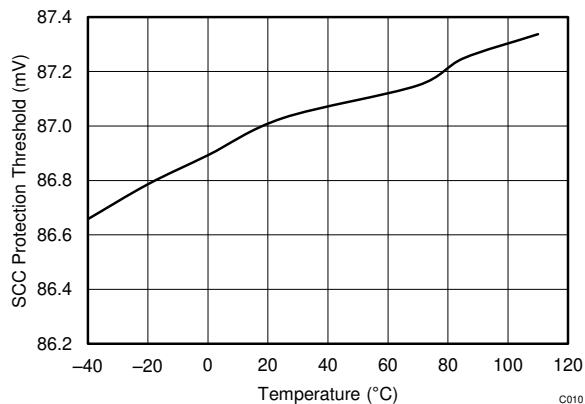


Threshold setting is 88.8 mV.

**Figure 7-8. Short Circuit Charge Protection Threshold vs. Temperature**

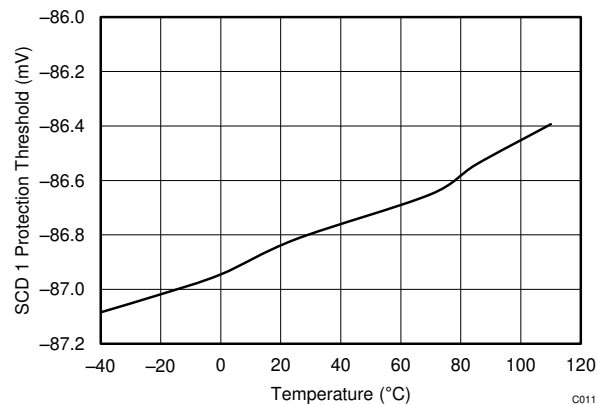


Threshold setting is -88.8 mV.

**Figure 7-9. Short Circuit Discharge 1 Protection Threshold vs. Temperature**

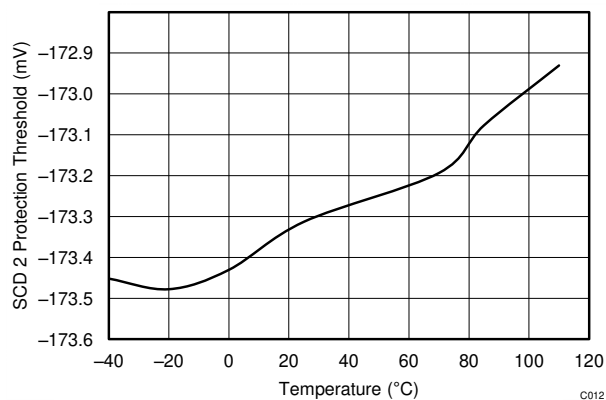


Threshold setting is -177.7 mV.

**Figure 7-10. Short Circuit Discharge 2 Protection Threshold vs. Temperature**

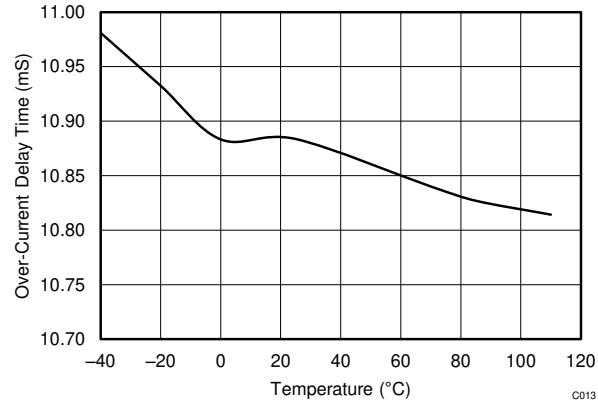


Threshold setting is 11 ms.

**Figure 7-11. Overcurrent Delay Time vs. Temperature**

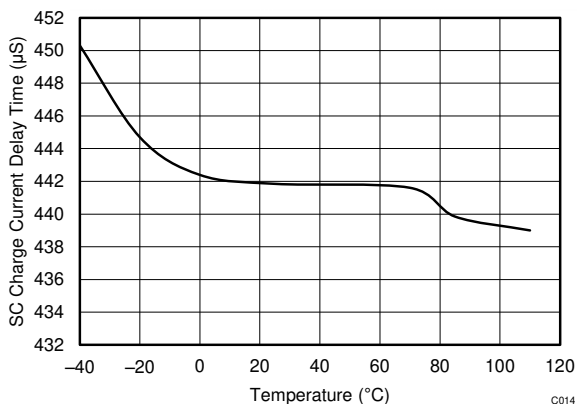


Threshold setting is 465 μs.

**Figure 7-12. Short Circuit Charge Current Delay Time vs. Temperature**

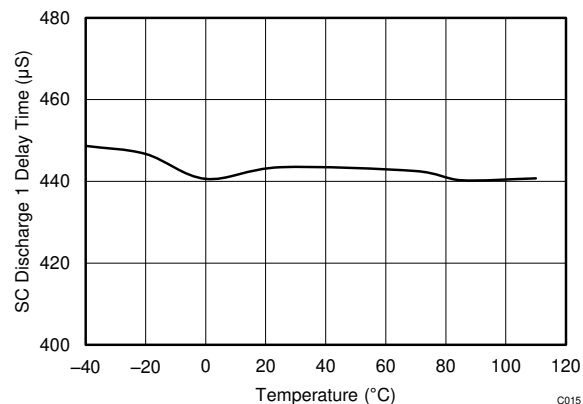


Threshold setting is 465 μs (including internal delay).

**Figure 7-13. Short Circuit Discharge 1 Delay Time vs. Temperature**

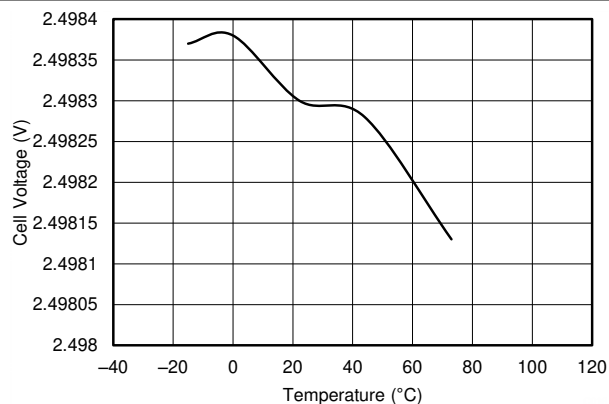


**Figure 7-14.  $V_{CELL}$  Measurement at 2.5-V vs. Temperature**

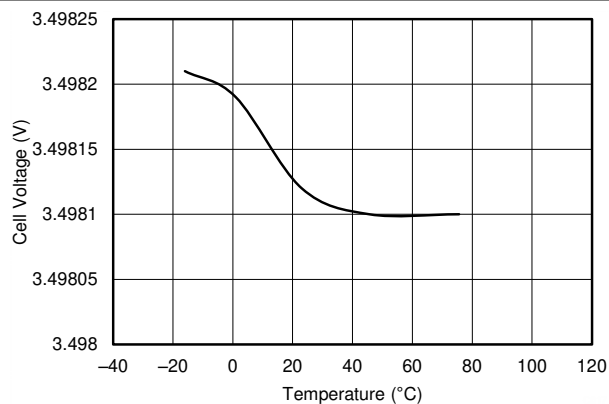


This is the  $V_{CELL}$  average for single cell.

**Figure 7-15.  $V_{CELL}$  Measurement at 3.5-V vs. Temperature**

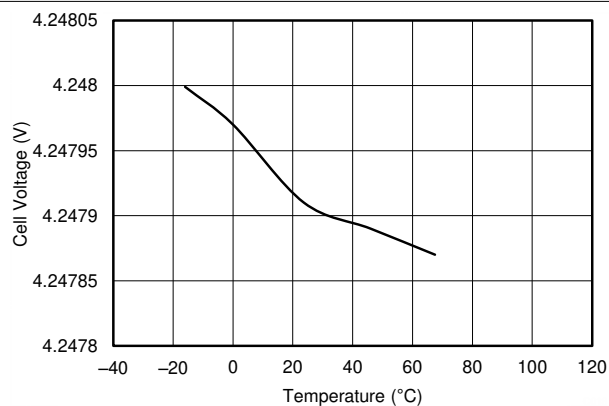

This is the  $V_{CELL}$  average for single cell.

**Figure 7-16.  $V_{CELL}$  Measurement at 4.25-V vs. Temperature**

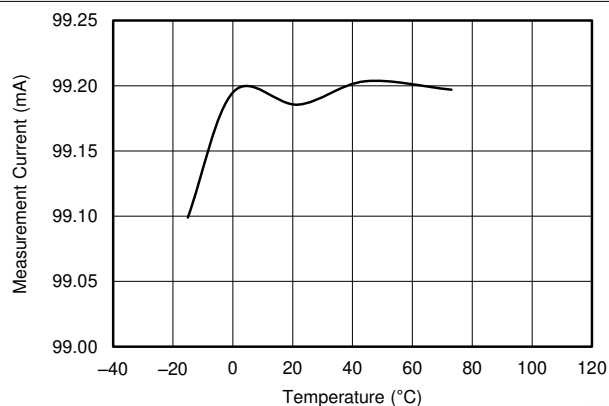

$I_{SET} = 100 \text{ mA}$ ,  $RSNS = 1 \Omega$

**Figure 7-17.  $I$  Measured vs. Temperature**


## 8 Detailed Description

### 8.1 Overview

The BQ28Z610 gas gauge is a fully integrated battery manager that employs flash-based firmware and integrated hardware protection to provide a complete solution for battery-stack architectures composed of 1-series to 2-series cells. The BQ28Z610 device interfaces with a host system through an I<sup>2</sup>C protocol. High-performance, integrated analog peripherals enable support for a sense resistor down to 1 mΩ and simultaneous current/voltage data conversion for instant power calculations. The following sections detail all of the major component blocks included as part of the BQ28Z610 device.

### 8.2 Functional Block Diagram

The *Functional Block Diagram* depicts the analog (AFE) and digital (AGG) peripheral content in the BQ28Z610 device.

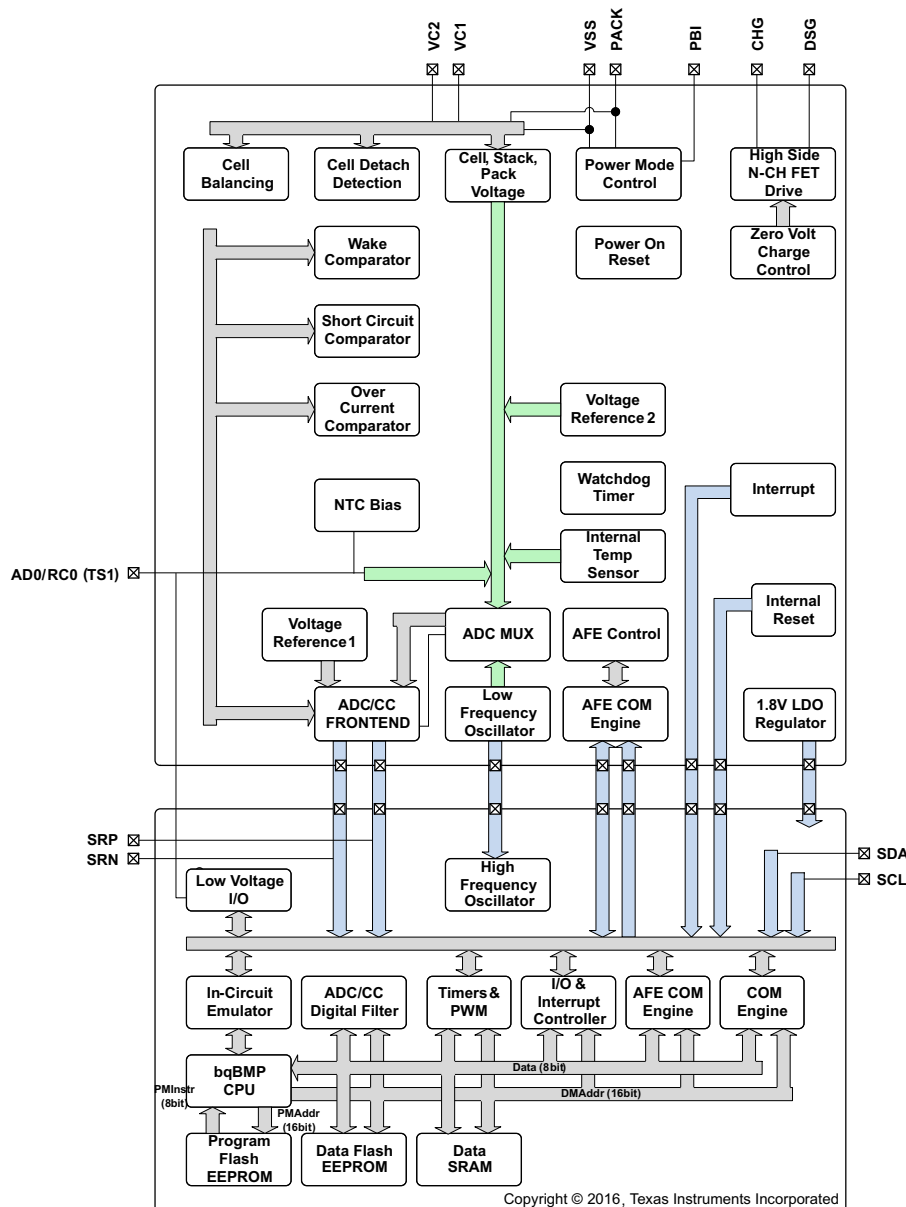



## 8.3 Feature Description

### 8.3.1 Battery Parameter Measurements

The BQ28Z610 device measures cell voltage and current simultaneously, and also measures temperature to calculate the information related to remaining capacity, full charge capacity, state-of-health, and other gauging parameters.

#### 8.3.1.1 BQ28Z610 Processor

The BQ28Z610 device uses a custom TI-proprietary processor design that features a Harvard architecture and operates at frequencies up to 4.2 MHz. Using an adaptive, three-stage instruction pipeline, the BQ28Z610 processor supports variable instruction length of 8, 16, or 24 bits.

### 8.3.2 Coulomb Counter (CC)

The first ADC is an integrating converter designed specifically for coulomb counting. The converter resolution is a function of its full-scale range and number of bits, yielding a 3.74- $\mu$ V resolution.

### 8.3.3 CC Digital Filter

The CC digital filter generates a 16-bit conversion value from the delta-sigma CC front-end. Its FIR filter uses the LFO clock output, which allows it to stop the HFO clock during conversions. New conversions are available every 250 ms while CCTL[CC\_ON] = 1. Proper use of this peripheral requires turning on the CC modulator in the AFE.

### 8.3.4 ADC Multiplexer

The ADC multiplexer provides selectable connections to the VCx inputs, TS1 inputs, internal temperature sensor, internal reference voltages, internal 1.8-V regulator, PACK input, and VSS ground reference input. In addition, the multiplexer can independently enable the TS1 input connection to the internal thermistor biasing circuitry, and also enables the user to short the multiplexer inputs for test and calibration purposes.

### 8.3.5 Analog-to-Digital Converter (ADC)

The second ADC is a 16-bit delta-sigma converter designed for general-purpose measurements. The ADC automatically scales the input voltage range during sampling based on channel selection. The converter resolution is a function of its full-scale range and number of bits, yielding a 38- $\mu$ V resolution. The default conversion time of the ADC is 31.25 ms, but is user-configurable down to 1.95 ms. Decreasing the conversion time presents a tradeoff between conversion speed and accuracy, as the resolution decreases for faster conversion times.

### 8.3.6 ADC Digital Filter

The ADC digital filter generates a 24-bit conversion result from the delta-sigma ADC front end. Its FIR filter uses the LFO clock, which allows it to stop the HFO clock during conversions. The ADC digital filter is capable of providing two 24-bit results: one result from the delta-sigma ADC front-end and a second synchronous result from the delta-sigma CC front-end.

### 8.3.7 Internal Temperature Sensor

An internal temperature sensor is available on the BQ28Z610 device to reduce the cost, power, and size of the external components necessary to measure temperature. It is available for connection to the ADC using the multiplexer, and is ideal for quickly determining pack temperature under a variety of operating conditions.

### 8.3.8 External Temperature Sensor Support

The TS1 input is enabled with an internal 18-k $\Omega$  (Typ.) linearization pullup resistor to support using a 10-k $\Omega$  (25°C) NTC external thermistor, such as the Semitec 103AT-2. The NTC thermistor should be connected between VSS and the individual TS1 pin. The ADC, through its input multiplexer, then takes the analog measurement. If a different thermistor type is required, changes to configurations may be required.

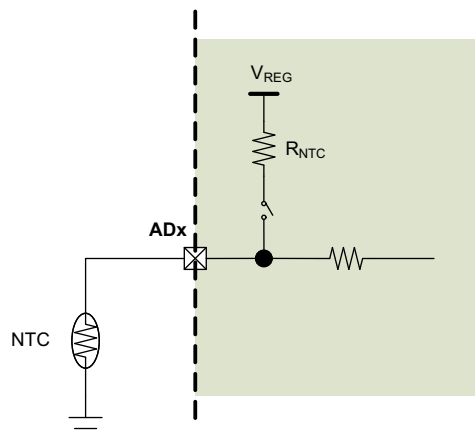


Figure 8-1. External Thermistor Biasing

### 8.3.9 Power Supply Control

The BQ28Z610 device manages its supply voltage dynamically according to operating conditions. When  $V_{VC2} > V_{SWITCHOVER-} + V_{HYS}$ , the AFE connects an internal switch to BAT and uses this pin to supply power to its internal 1.8-V LDO, which subsequently powers all device logic and flash operations. Once VC2 decreases to  $V_{VC2} < V_{SWITCHOVER-}$ , the AFE disconnects its internal switch from VC2 and connects another switch to PACK, allowing sourcing of power from a charger (if present). An external capacitor connected to PBI provides a momentary supply voltage to help guard against system brownouts due to transient short-circuit or overload events that pull VC2 below  $V_{SWITCHOVER-}$ .

### 8.3.10 Power-On Reset

In the event of a power-cycle, the BQ28Z610 AFE holds its internal RESET output pin high for  $t_{RST}$  duration to allow its internal 1.8-V LDO and LFO to stabilize before running the AGG. The AFE enters power-on reset when the voltage at  $V_{REG}$  falls below  $V_{REGIT-}$  and exits reset when  $V_{REG}$  rises above  $V_{REGIT-} + V_{HYS}$  for  $t_{RST}$  time. After  $t_{RST}$ , the BQ28Z610 AGG will write its trim values to the AFE.

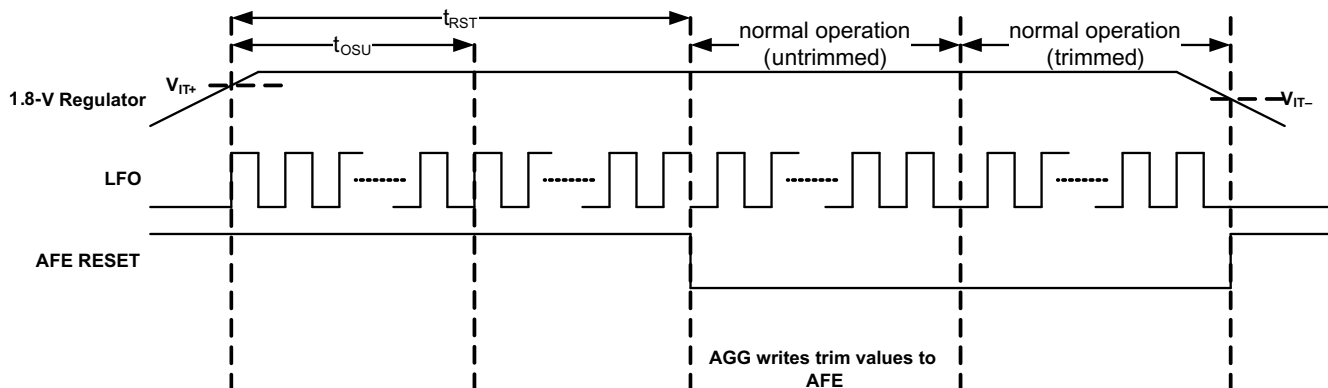


Figure 8-2. POR Timing Diagram

### 8.3.11 Bus Communication Interface

The BQ28Z610 device has an I<sup>2</sup>C bus communication interface. This device has the option to broadcast information to a smart charger to provide key information to adjust the charging current and charging voltage based on the temperature or individual cell voltages.

### CAUTION

If the device is configured as a single-master architecture (an application processor) and an occasional NACK is detected in the operation, the master can resend the transaction. However, in a multi-master architecture, an incorrect ACK leading to accidental loss of bus arbitration can cause a master to wait incorrectly for another master to clear the bus. If this master does not get a bus-free signal, then it must have in place a method to look for the bus and assume it is free after some period of time. Also, if possible, set the clock speed to be 100 kHz or less to significantly reduce the issue described above for multi-mode operation.

### 8.3.12 Cell Balancing Support

The integrated cell balancing FETs included in the BQ28Z610 device enable the AFE to bypass cell current around a given cell or numerous cells to effectively balance the entire battery stack. External series resistors placed between the cell connections and the VCx input pins set the balancing current magnitude. The cell balancing circuitry can be enabled or disabled through the **CELL\_BAL\_DET[CB2, CB1]** control register. Series input resistors between 100  $\Omega$  and 1 k $\Omega$  are recommended for effective cell balancing.

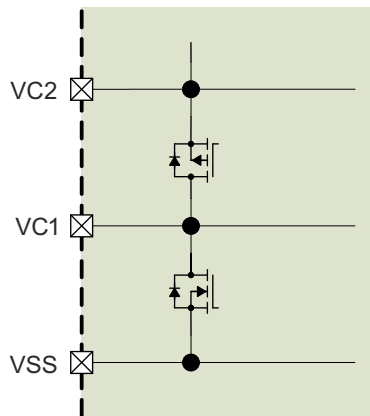


Figure 8-3. Internal Cell Balancing

### 8.3.13 N-Channel Protection FET Drive

The BQ28Z610 device controls two external N-Channel MOSFETs in a back-to-back configuration for battery protection. The charge (CHG) and discharge (DSG) FETs are automatically disabled if a safety fault (AOLD, ASSC, ASCD, SOV) is detected, and can also be manually turned off using **AFE\_CONTROL[CHGEN, DSGEN]** = 0, 0. When the gate drive is disabled, an internal circuit discharges CHG to VC2 and DSG to PACK.

### 8.3.14 Low Frequency Oscillator

The BQ28Z610 AFE includes a low frequency oscillator (LFO) running at 262.144 kHz. The AFE monitors the LFO frequency and indicates a failure through **LATCH\_STATUS[LFO]** if the output frequency is much lower than normal.

### 8.3.15 High Frequency Oscillator

The BQ28Z610 AGG includes a high frequency oscillator (HFO) running at 16.78 MHz. It is synthesized from the LFO output and scaled down to 8.388 MHz with 50% duty cycle.

### 8.3.16 1.8-V Low Dropout Regulator

The BQ28Z610 AFE contains an integrated 1.8-V LDO that provides regulated supply voltage for the device CPU and internal digital logic.

### 8.3.17 Internal Voltage References

The BQ28Z610 AFE provides two internal voltage references with  $V_{REF1}$ , used by the ADC and CC, while  $V_{REF2}$  is used by the LDO, LFO, current wake comparator, and OCD/SCC/SCD1/SCD2 current protection circuitry.

### 8.3.18 Overcurrent in Discharge Protection

The overcurrent in discharge (OCD) function detects abnormally high current in the discharge direction. The overload in discharge threshold and delay time are configurable through the OCD\_CONTROL register. The thresholds and timing can be fine-tuned even further, based on a sense resistor with lower resistance or wider tolerance through the PROTECTION\_CONTROL register. The detection circuit also incorporates a filtered delay before disabling the CHG and DSG FETs. When an OCD event occurs, the **LATCH\_STATUS[OCD]** bit is set to 1 and is latched until it is cleared and the fault condition has been removed.

### 8.3.19 Short-Circuit Current in Charge Protection

The short-circuit current in charge (SCC) function detects catastrophic current conditions in the charge direction. The short-circuit in charge threshold and delay time are configurable through the SCC\_CONTROL register. The thresholds and timing can be fine-tuned even further based on a sense resistor with lower resistance or wider tolerance through the PROTECTION\_CONTROL register. The detection circuit also incorporates a blanking delay before disabling the CHG and DSG FETs. When an SCC event occurs, the **LATCH\_STATUS[SCC]** bit is set to 1 and is latched until it is cleared and the fault condition has been removed.

### 8.3.20 Short-Circuit Current in Discharge 1 and 2 Protection

The short-circuit current in discharge (SCD) function detects catastrophic current conditions in the discharge direction. The short-circuit in discharge thresholds and delay times are configurable through the SCD1\_CONTROL and SCD2\_CONTROL registers. The thresholds and timing can be fine-tuned even further, based on a sense resistor with lower resistance or wider tolerance through the PROTECTION\_CONTROL register. The detection circuit also incorporates a blanking delay before disabling the CHG and DSG FETs. When an SCD event occurs, the **LATCH\_STATUS[SCD1]** or **LATCH\_STATUS[SCD2]** bit is set to 1 and is latched until it is cleared and the fault condition has been removed.

### 8.3.21 Primary Protection Features

The BQ28Z610 gas gauge supports the following battery and system level protection features, which can be configured using firmware:

- Cell Undervoltage Protection
- Cell Overvoltage Protection
- Overcurrent in CHARGE Mode Protection
- Overcurrent in DISCHARGE Mode Protection
- Overload in DISCHARGE Mode Protection
- Short Circuit in CHARGE Mode Protection
- Overtemperature in CHARGE Mode Protection
- Overtemperature in DISCHARGE Mode Protection
- Precharge Timeout Protection
- Fast Charge Timeout Protection

### 8.3.22 Gas Gauging

This device uses the Impedance Track™ technology to measure and determine the available charge in battery cells. The accuracy achieved using this method is better than 1% error over the lifetime of the battery. There is no full charge/discharge learning cycle required. See the [Theory and Implementation of Impedance Track Battery Fuel-Gauging Algorithm Application Report \(SLUA364B\)](#) for further details.

### 8.3.23 Charge Control Features

This device supports charge control features, such as:

- Reports charging voltage and charging current based on the active temperature range—JEITA temperature ranges T1, T2, T3, T4, T5, and T6
- Provides more complex charging profiles, including sub-ranges within a standard temperature range
- Reports the appropriate charging current required for constant current charging and the appropriate charging voltage needed for constant voltage charging to a smart charger, using the bus communication interface
- Selects the chemical state-of-charge of each battery cell using the Impedance Track method, and reduces the voltage difference between cells when cell balancing multiple cells in a series
- Provides pre-charging/zero-volt charging
- Employs charge inhibit and charge suspend if battery pack temperature is out of programmed range
- Reports charging faults and indicates charge status from charge and discharge alarms

### 8.3.24 Authentication

This device supports security by:

- Authentication by the host using the SHA-1 method
- The gas gauge requires SHA-1 authentication before the device can be unsealed or allow full access.

## 8.4 Device Functional Modes

This device supports three modes, but the current consumption varies, based on firmware control of certain functions and modes of operation:

- **NORMAL mode:** In this mode, the device performs measurements, calculations, protections, and data updates every 250-ms intervals. Between these intervals, the device is operating in a reduced power stage to minimize total average current consumption.
- **SLEEP mode:** In this mode, the device performs measurements, calculations, protections, and data updates in adjustable time intervals. Between these intervals, the device is operating in a reduced power stage to minimize total average current consumption.
- **SHUTDOWN mode:** The device is completely disabled.

### 8.4.1 Lifetime Logging Features

The device supports data logging of several key parameters for warranty and analysis:

- Maximum and Minimum Cell Temperature
- Maximum Current in CHARGE or DISCHARGE Mode
- Maximum and Minimum Cell Voltages

### 8.4.2 Configuration

The device supports accurate data measurements and data logging of several key parameters.

#### 8.4.2.1 Coulomb Counting

The device uses an integrating delta-sigma analog-to-digital converter (ADC) for current measurement. The ADC measures charge/discharge flow of the battery by measuring the voltage across a very small external sense resistor. The integrating ADC measures a bipolar signal from a range of –100 mV to 100 mV, with a positive value when  $V_{(SRP)} - V_{(SRN)}$ , indicating charge current and a negative value indicating discharge current. The integration method uses a continuous timer and internal counter, which has a rate of 0.65 nVh.

#### 8.4.2.2 Cell Voltage Measurements

The BQ28Z610 measures the individual cell voltages at 250-ms intervals using an ADC. This measured value is internally scaled for the ADC and is calibrated to reduce any errors due to offsets. This data is also used for calculating the impedance of the individual cell for Impedance Track gas gauging.

#### **8.4.2.3 Current Measurements**

The current measurement is performed by measuring the voltage drop across the external sense resistor (1 mΩ to 3 mΩ) and the polarity of the differential voltage determines if the cell is in the CHARGE or DISCHARGE mode.


#### **8.4.2.4 Auto Calibration**

The auto-calibration feature helps to cancel any voltage offset across the SRP and SRN pins for accurate measurement of the cell voltage, charge/discharge current, and thermistor temperature. The auto-calibration is performed when there is no communication activity for a minimum of 5 s on the bus lines.

#### **8.4.2.5 Temperature Measurements**

This device has an internal sensor for on-die temperature measurements, and supports external temperature measurements through the external NTC on the TS1 pin. These two measurements are individually enabled and configured.

Product Folder Links: [BQ28Z610](#)

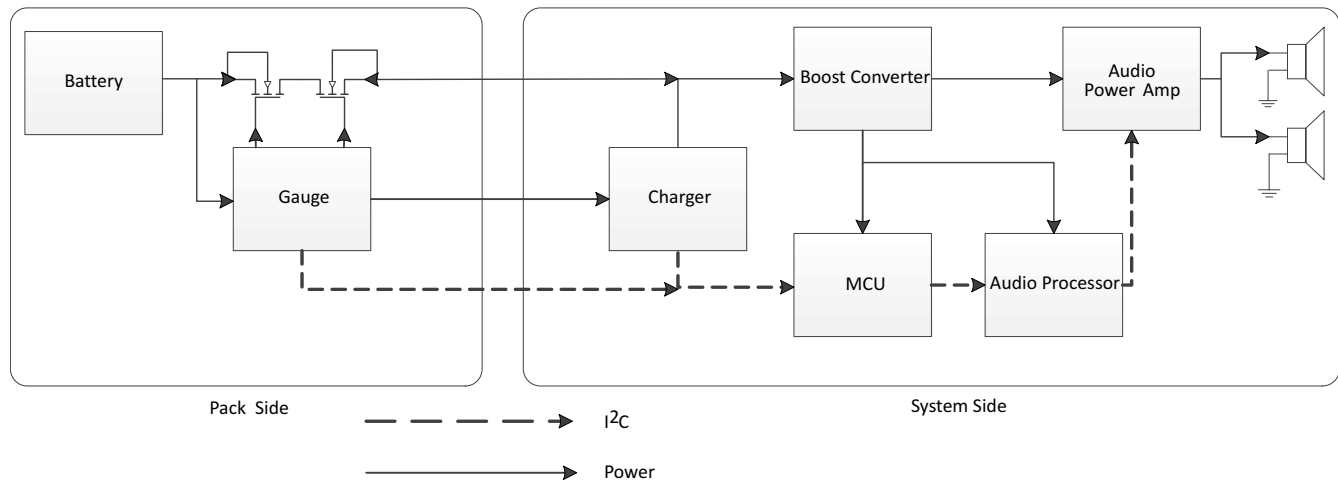

Copyright © 2017, Texas Instruments Incorporated

**Figure 9-2. Wireless (Bluetooth) Speaker Application Block Diagram****9.2.1 Design Requirements (Default)**

| Design Parameter                         | Example                                      |
|------------------------------------------|----------------------------------------------|
| Cell Configuration                       | 2s1p (2-series with 1 Parallel)              |
| Design Capacity                          | 4400 mAh                                     |
| Device Chemistry                         | 100 (LiCoO <sub>2</sub> /graphitized carbon) |
| Cell Overvoltage at Standard Temperature | 4300 mV                                      |
| Cell Undervoltage                        | 2500 mV                                      |
| Shutdown Voltage                         | 2300 mV                                      |
| Overcurrent in CHARGE Mode               | 6000 mA                                      |
| Overcurrent in DISCHARGE Mode            | –6000 mA                                     |
| Short Circuit in CHARGE Mode             | 0.1 V/Rsense across SRP, SRN                 |
| Short Circuit in DISCHARGE 1 Mode        | –0.1 V/Rsense across SRP, SRN                |
| Safety Over Voltage                      | 4500 mV                                      |
| Cell Balancing                           | Disabled                                     |
| Internal and External Temperature Sensor | Enabled                                      |
| Under Temperature Charging               | 0°C                                          |
| Under Temperature Discharging            | 0°C                                          |
| BROADCAST Mode                           | Enabled                                      |

**9.2.2 Detailed Design Procedure****9.2.2.1 Setting Design Parameters**

For the firmware settings needed for the design requirements, refer to the [BQ28Z610 Technical Reference Manual \(SLUUA65\)](#).

- To set the 2s1p battery pack, go to data flash **Configuration: DA Configuration** register's bit 0 (CC0) = 1.
- To set design capacity, set the data flash value to 4400 in the **Gas Gauging: Design: Design Capacity** register.
- To set device chemistry, go to data flash **SBS Configuration: Data: Device Chemistry**. The BQSTUDIO software automatically populates the correct chemistry identification. This selection is derived from using the BQCHEM feature in the tools and choosing the option that matches the device chemistry from the list.
- To protect against cell overvoltage, set the data flash value to 4300 in **Protections: COV: Standard Temp**.
- To protect against cell undervoltage, set the data flash value to 2500 in the **Protections: CUV** register.
- To set the shutdown voltage to prevent further pack depletion due to low pack voltage, program **Power: Shutdown: Shutdown** voltage = 2300.



- To protect against large charging currents when the AC adapter is attached, set the data flash value to 6000 in the **Protections: OCC: Threshold** register.
- To protect against large discharging currents when heavy loads are attached, set the data flash value to –6000 in the **Protections: OCD: Threshold** register.
- Program a short circuit delay timer and threshold setting to enable the operating the system for large short transient current pulses. These two parameters are under **Protections: ASCC: Threshold** = 100 for charging current. The discharge current setting is **Protections: ASCD: Threshold** = –100 mV.
- To prevent the cells from overcharging and adding a second level of safety, there is a register setting that will shut down the device if any of the cells voltage measurement is greater than the Safety Over Voltage setting for greater than the delay time. Set this data flash value to 4500 in **Permanent Fail: SOV: Threshold**.
- To disable the cell balancing feature, set the data flash value to 0 in **Settings: Configuration: Balancing Configuration**: bit 0 (CB).
- To enable the internal temperature and the external temperature sensors: Set **Settings: Configuration: Temperature Enable**: Bit 0 (TSInt) = 1 for the internal sensor; set Bit 1 (TS1) = 1 for the external sensor.
- To prevent charging of the battery pack if the temperature falls below 0°C, set **Protections: UTC: Threshold** = 0.
- To prevent discharging of the battery pack if the temperature falls below 0°C, set **Protections: UTD: Threshold** = 0.
- To provide required information to the smart chargers, the gas gauge must operate in BROADCAST mode. To enable this, set the [BCAST] bit in **Configuration: SBS Configuration 2**: Bit 0 [BCAST] = 1.

Each parameter listed for fault trigger thresholds has a delay timer setting associated for any noise filtering. These values, along with the trigger thresholds for fault detection, may be changed based upon the application requirements using the data flash settings in the appropriate register stated in the [BQ28Z610 Technical Reference Manual \(SLUUA65\)](#).

### 9.2.3 Calibration Process

The calibration of current, voltage, and temperature readings is accessible by writing 0xF081 or 0xF082 to *ManufacturerAccess()*. A detailed procedure is included in the [BQ28Z610 Technical Reference Manual \(SLUUA65\)](#) in the *Calibration* section. The description allows for calibration of Cell Voltage Measurement Offset, Battery Voltage, Pack Voltage, Current Calibration, Coulomb Counter Offset, PCB Offset, CC Gain/Capacity Gain, and Temperature Measurement for both internal and external sensors.

### 9.2.4 Gauging Data Updates

When a battery pack enabled with the BQ28Z610 is first cycled, the value of *FullChargeCapacity()* updates several times. [Figure 9-3](#) shows *RemainingCapacity()* and *FullChargeCapacity()*, and where those updates occur. As part of the Impedance Track algorithm, it is expected that *FullChargeCapacity()* may update at the end of charge, at the end of discharge, and at rest.

### 9.2.4.1 Application Curve

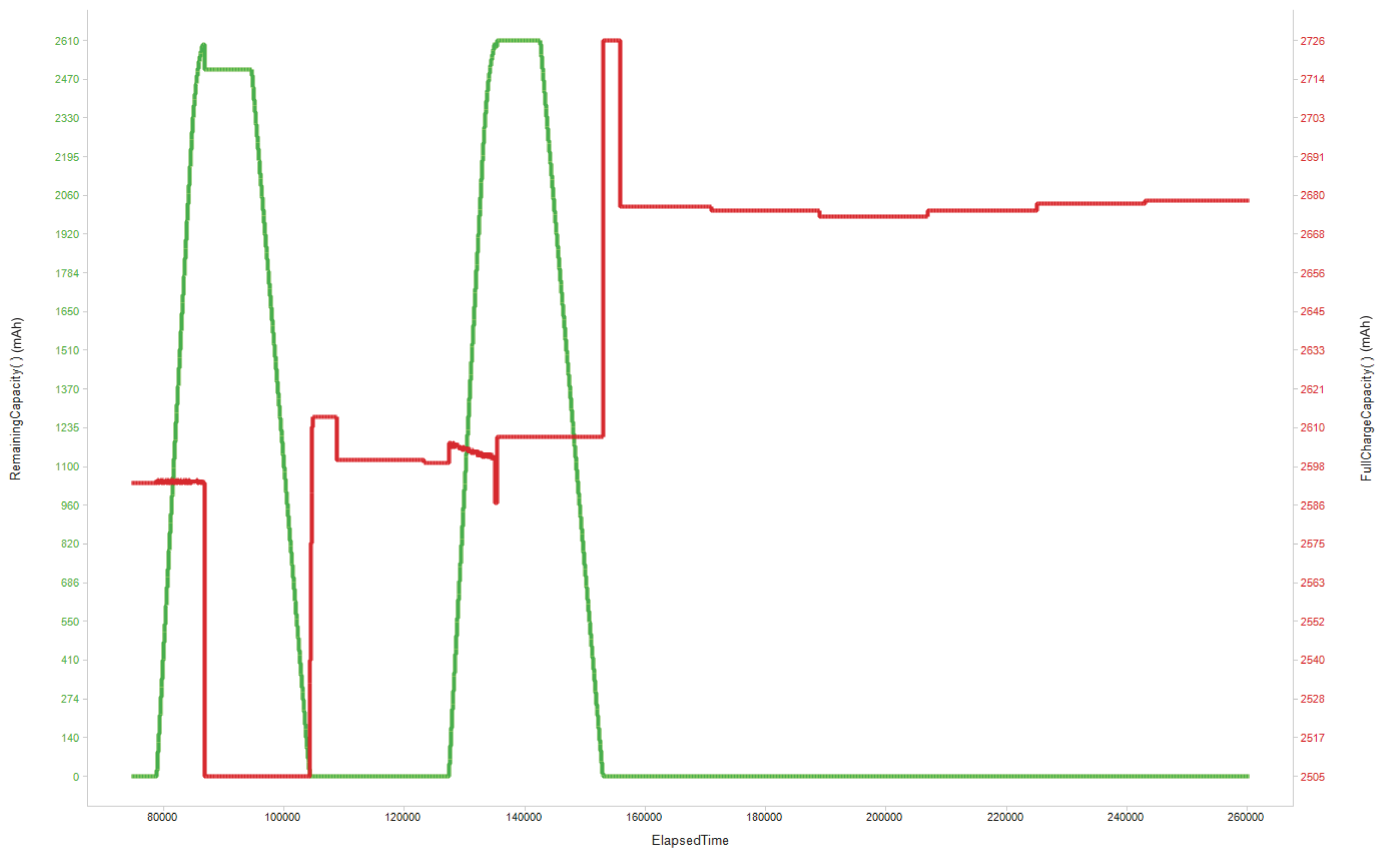


Figure 9-3. Elapsed Time(s)


### Power Supply Requirements

There are two inputs for this device, the PACK input and VC2. The PACK input can be an unregulated input from a typical AC adapter. This input should always be greater than the maximum voltage associated with the number of series cells configured. The input voltage for the VC2 pin will have a minimum of 2.2 V to a maximum of 26 V with the recommended external RC filter.

## 10 Layout

### 10.1 Layout Guidelines

- The layout for the high-current path begins at the PACK+ pin of the battery pack. As charge current travels through the pack, it finds its way through protection FETs, a chemical fuse, the Li-ion cells and cell connections, and the sense resistor, and then returns to the PACK– pin. In addition, some components are placed across the PACK+ and PACK– pins to reduce effects from electrostatic discharge.
- The N-channel charge and discharge FETs must be selected for a given application. Most portable battery applications are a good option for the CSD16412Q5A. These FETs are rated at 14-A, 25-V device with  $R_{ds(on)}$  of 11 m $\Omega$  when the gate drive voltage is 10 V. The gates of all protection FETs are pulled to the source with a high-value resistor between the gate and source to ensure they are turned off if the gate drive is open. The capacitors (both 0.1  $\mu$ F values) placed across the FETs are to help protect the FETs during an ESD event. The use of two devices ensures normal operation if one of them becomes shorted. For effective ESD protection, the copper trace inductance of the capacitor leads must be designed to be as short and wide as possible. Ensure that the voltage rating of both these capacitors is adequate to hold off the applied voltage if one of the capacitors becomes shorted.
- The quality of the Kelvin connections at the sense resistor is critical. The sense resistor must have a temperature coefficient no greater than 50 ppm in order to minimize current measurement drift with temperature. Choose the value of the sense resistor to correspond to the available overcurrent and short-circuit ranges of the BQ28Z610. Select the smallest value possible in order to minimize the negative voltage generated on the BQ28Z610 VSS node(s) during a short circuit. This pin has an absolute minimum of –0.3 V. Parallel resistors can be used as long as good Kelvin sensing is ensured. The device is designed to support a 1-m $\Omega$  to 3-m $\Omega$  sense resistor.
- A pair of series 0.1- $\mu$ F ceramic capacitors is placed across the PACK+ and PACK– pins to help in the mitigation of external electrostatic discharges. The two devices in series ensure continued operation of the pack if one of the capacitors becomes shorted. Optionally, a transorb such as the SMBJ2A can be placed across the pins to further improve ESD immunity.
- In reference to the gas gauge circuit the following features require attention for component placement and layout: Differential Low-Pass Filter, I<sup>2</sup>C communication, and PBI (Power Backup Input).
- The BQ28Z610 uses an integrating delta-sigma ADC for current measurements. Add a 100- $\Omega$  resistor from the sense resistor to the SRP and SRN inputs of the device. Place a 0.1- $\mu$ F filter capacitor across the SRP and SRN inputs. Optional 0.1- $\mu$ F filter capacitors can be added for additional noise filtering for each sense input pin to ground, if required for your circuit. Place all filter components as close as possible to the device. Route the traces from the sense resistor in parallel to the filter circuit. Adding a ground plane around the filter network can add additional noise immunity.

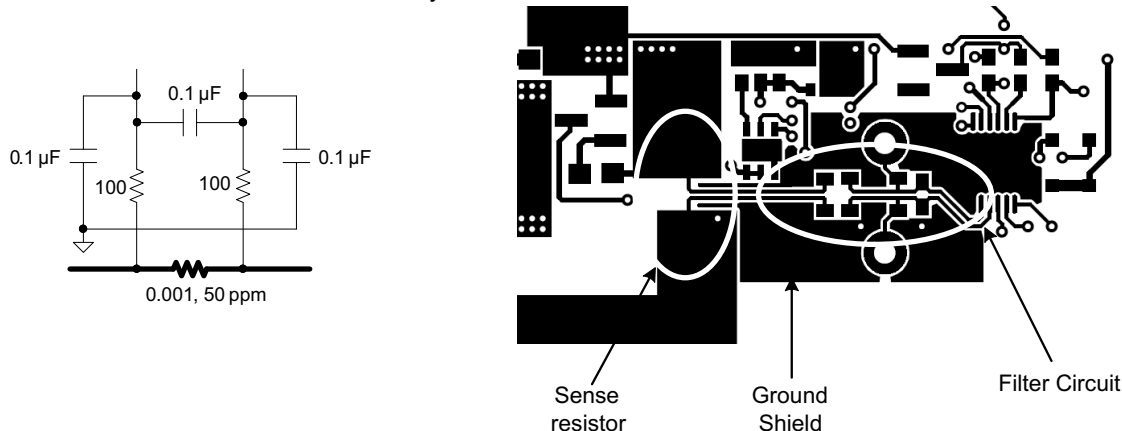


**Figure 10-1. BQ28Z610 Differential Filter**

- The BQ28Z610 has an internal LDO that is internally compensated and does not require an external decoupling capacitor. The PBI pin is used as a power supply backup input pin, providing power during brief transient power outages. A standard 2.2- $\mu$ F ceramic capacitor is connected from the PBI pin to ground, as shown in application example.

- The I<sup>2</sup>C clock and data pins have integrated high-voltage ESD protection circuits; however, adding a Zener diode and series resistor provides more robust ESD performance. The I<sup>2</sup>C clock and data lines have an internal pull-down. When the gas gauge senses that both lines are low (such as during removal of the pack), the device performs auto-offset calibration and then goes into SLEEP mode to conserve power.

## 10.2 Layout Example

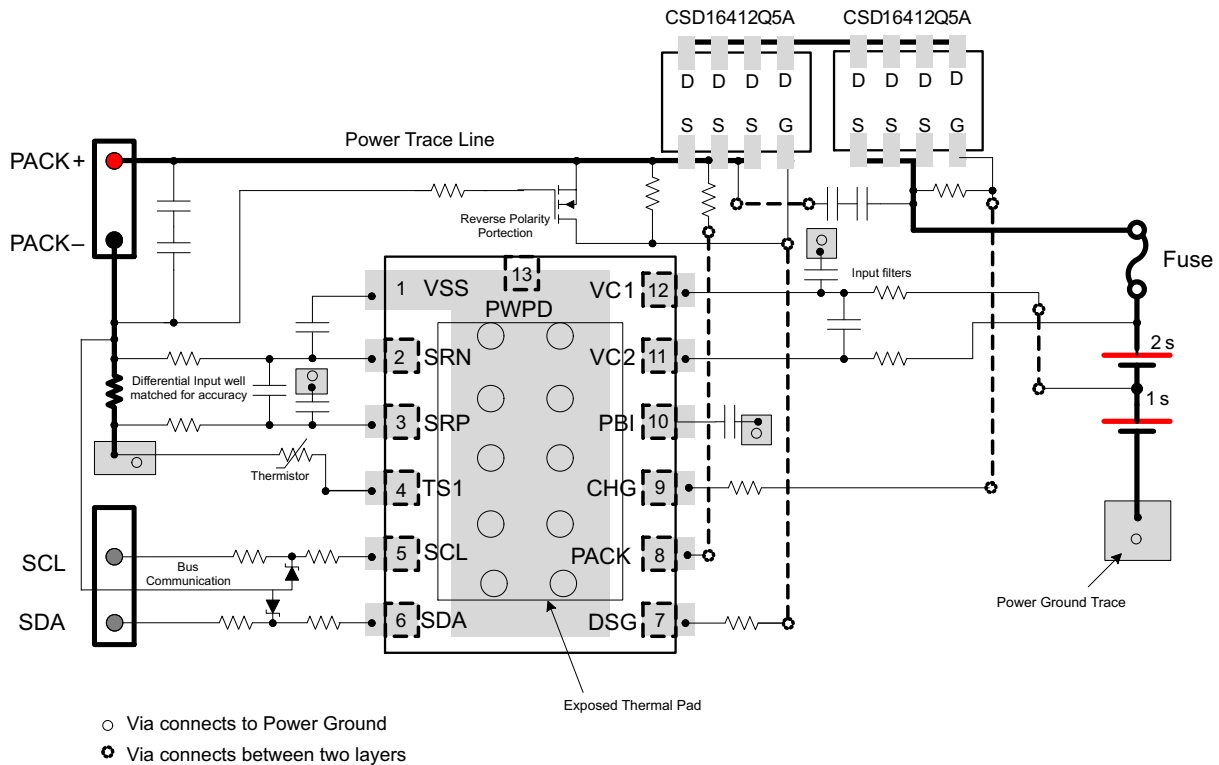

**Figure 10-2. BQ28Z610 Board Layout**

## 11 Device and Documentation Support

### 11.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

### 11.2 Documentation Support

- [BQ28Z610 Technical Reference Manual \(SLUUA65\)](#)
- [Theory and Implementation of Impedance Track Battery Fuel-Gauging Algorithm Application Report \(SLUA364B\)](#)

### 11.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 11.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 11.5 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 11.6 Trademarks

Impedance Track™ and TI E2E™ are trademarks of Texas Instruments.

Windows® is a registered trademark of Microsoft.

All trademarks are the property of their respective owners.

### 11.7 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">BQ28Z610DRZR</a> | Active        | Production           | SON (DRZ)   12 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | BQ28<br>Z610        |
| BQ28Z610DRZR.A               | Active        | Production           | SON (DRZ)   12 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | BQ28<br>Z610        |
| BQ28Z610DRZRG4               | Active        | Production           | SON (DRZ)   12 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | BQ28<br>Z610        |
| BQ28Z610DRZRG4.A             | Active        | Production           | SON (DRZ)   12 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | BQ28<br>Z610        |
| <a href="#">BQ28Z610DRZT</a> | Active        | Production           | SON (DRZ)   12 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | BQ28<br>Z610        |
| BQ28Z610DRZT.A               | Active        | Production           | SON (DRZ)   12 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | BQ28<br>Z610        |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION




\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| BQ28Z610DRZR   | SON          | DRZ             | 12   | 3000 | 330.0              | 12.4               | 2.8     | 4.3     | 1.2     | 4.0     | 12.0   | Q2            |
| BQ28Z610DRZRG4 | SON          | DRZ             | 12   | 3000 | 330.0              | 12.4               | 2.8     | 4.3     | 1.2     | 4.0     | 12.0   | Q2            |
| BQ28Z610DRZT   | SON          | DRZ             | 12   | 250  | 180.0              | 12.4               | 2.8     | 4.3     | 1.2     | 4.0     | 12.0   | Q2            |




## TAPE AND REEL BOX DIMENSIONS

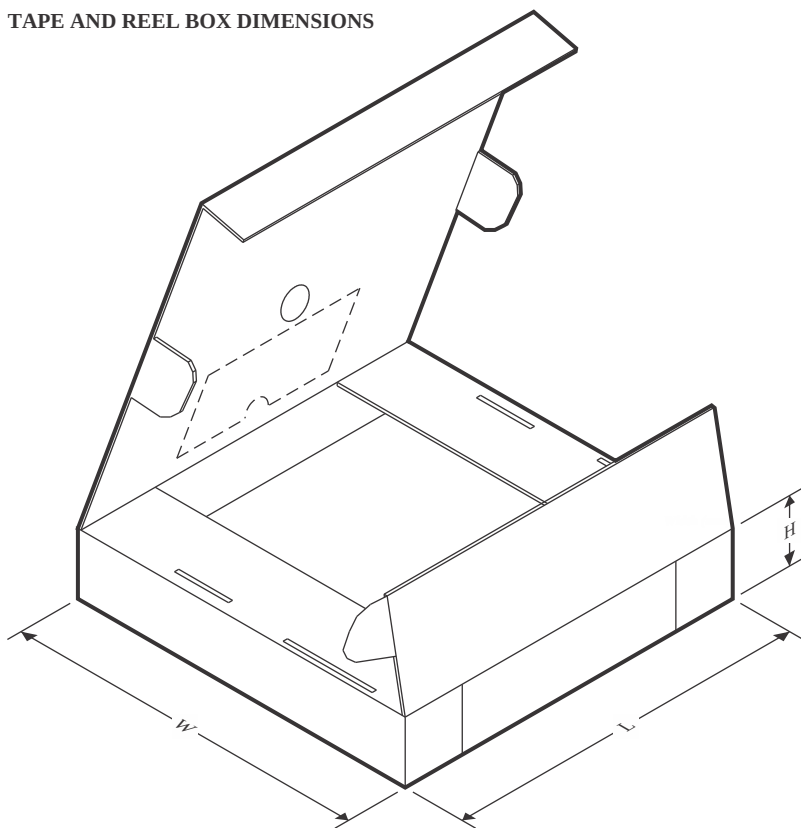

\*All dimensions are nominal


| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| BQ28Z610DRZR   | SON          | DRZ             | 12   | 3000 | 346.0       | 346.0      | 33.0        |
| BQ28Z610DRZRG4 | SON          | DRZ             | 12   | 3000 | 346.0       | 346.0      | 33.0        |
| BQ28Z610DRZT   | SON          | DRZ             | 12   | 250  | 552.0       | 185.0      | 36.0        |

## TUBE

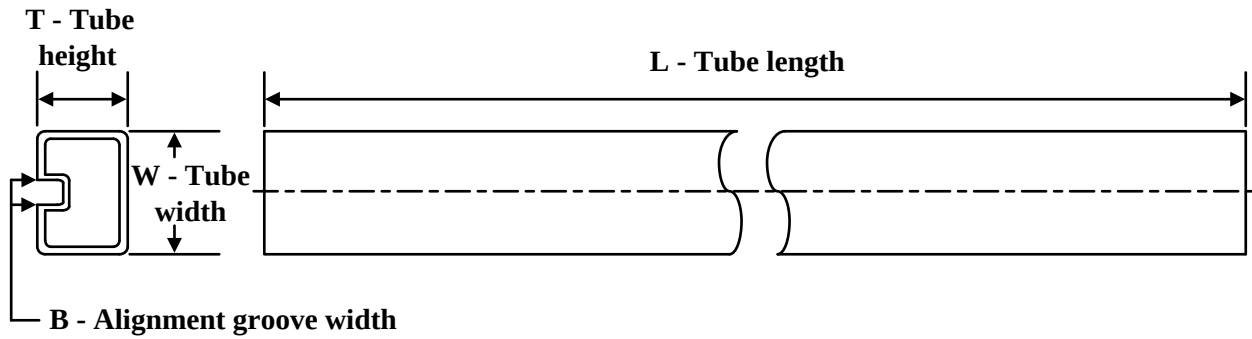

\*All dimensions are nominal


| Device         | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| BQ28Z610DRZT   | DRZ          | VSON         | 12   | 250 | 381.51 | 4.22   | 2286   | 0      |
| BQ28Z610DRZT.A | DRZ          | VSON         | 12   | 250 | 381.51 | 4.22   | 2286   | 0      |

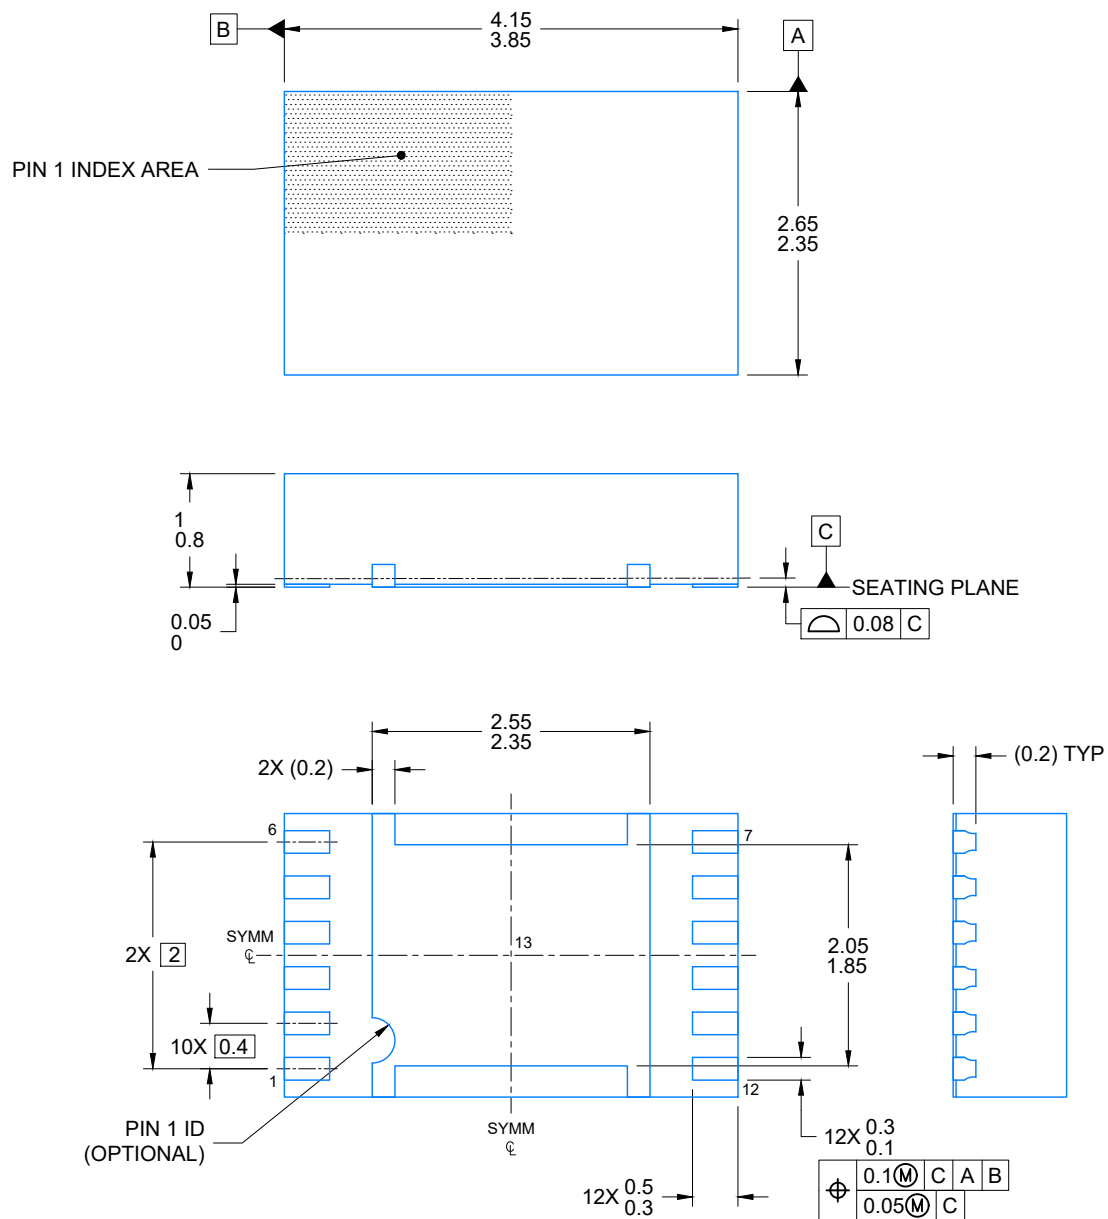



4218895/B 03/2022

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

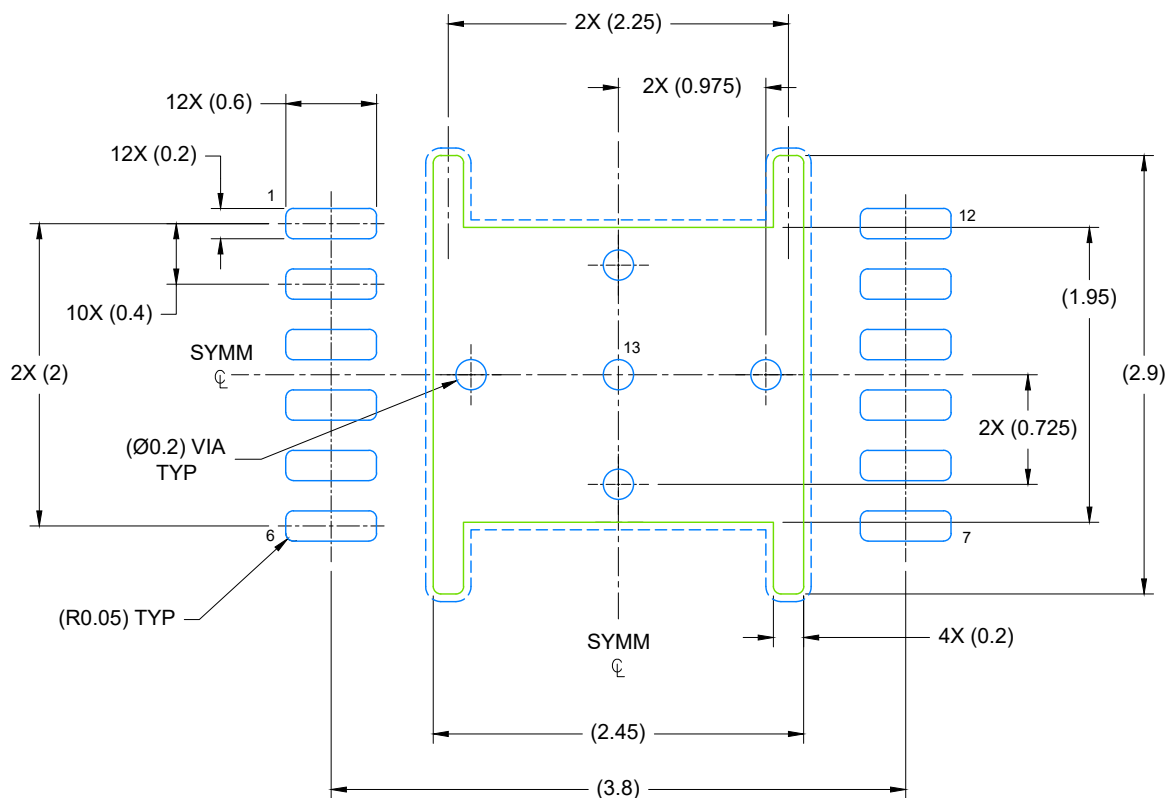

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 20X

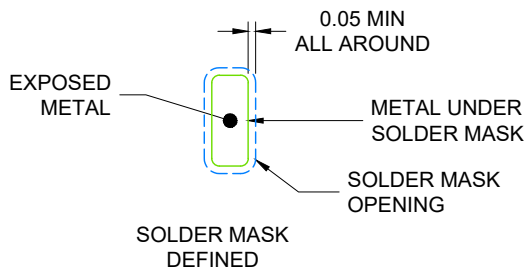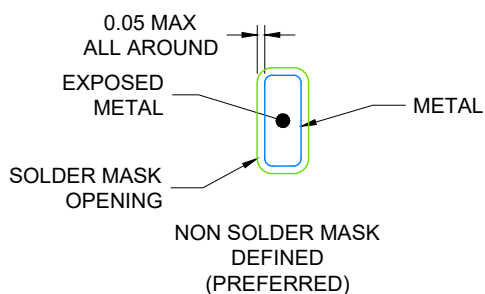


SOLDER MASK DETAILS

4218895/B 03/2022

NOTES: (continued)

- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

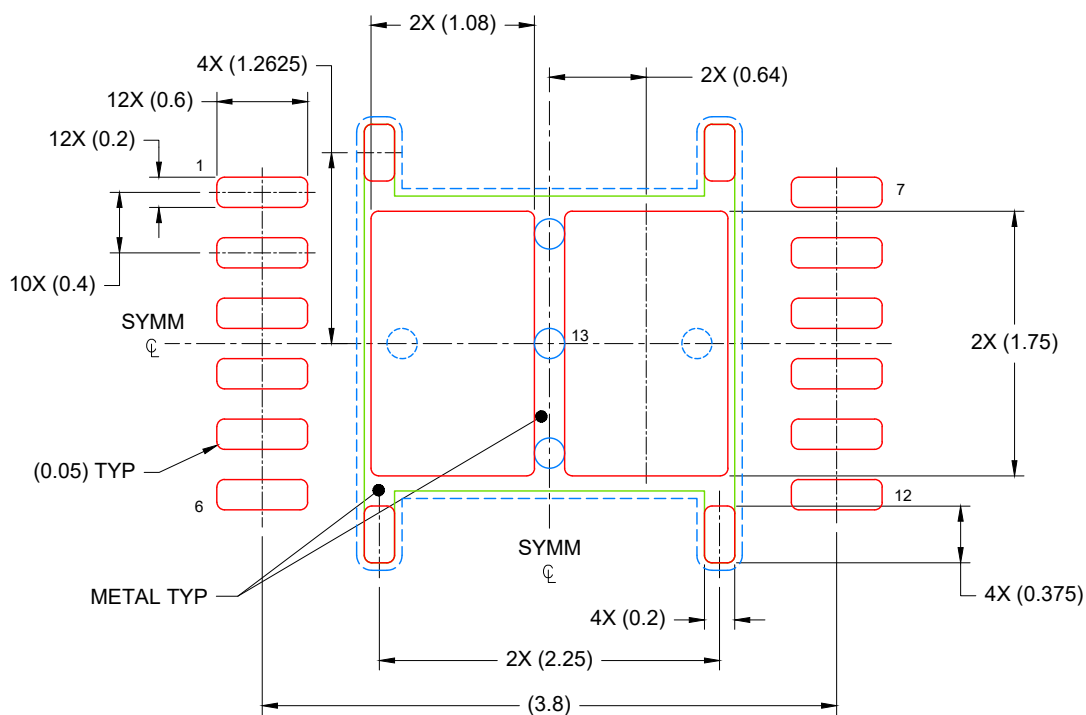

SOLDER PASTE EXAMPLE  
 BASED ON 0.1 mm THICK STENCIL

EXPOSED PAD  
 79% PRINTED COVERAGE BY AREA  
 SCALE: 20X

4218895/B 03/2022

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025